

8 Way Power Divider 2.0 ~8.0GHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)	VSWR Input Max	VSWR Output Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
50341086332T8SK	2.0 ~ 8.0	18	1.4	1.3	1.8(Split 9dB)	±5°	±0.5dB	SMA Female

Basic Specifications

Dimension	108*63*10mm	Impedance	50Ω
Splitter Power	30W	Operating Temperature	-55 ~ +85°C
Combiner Power	3W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

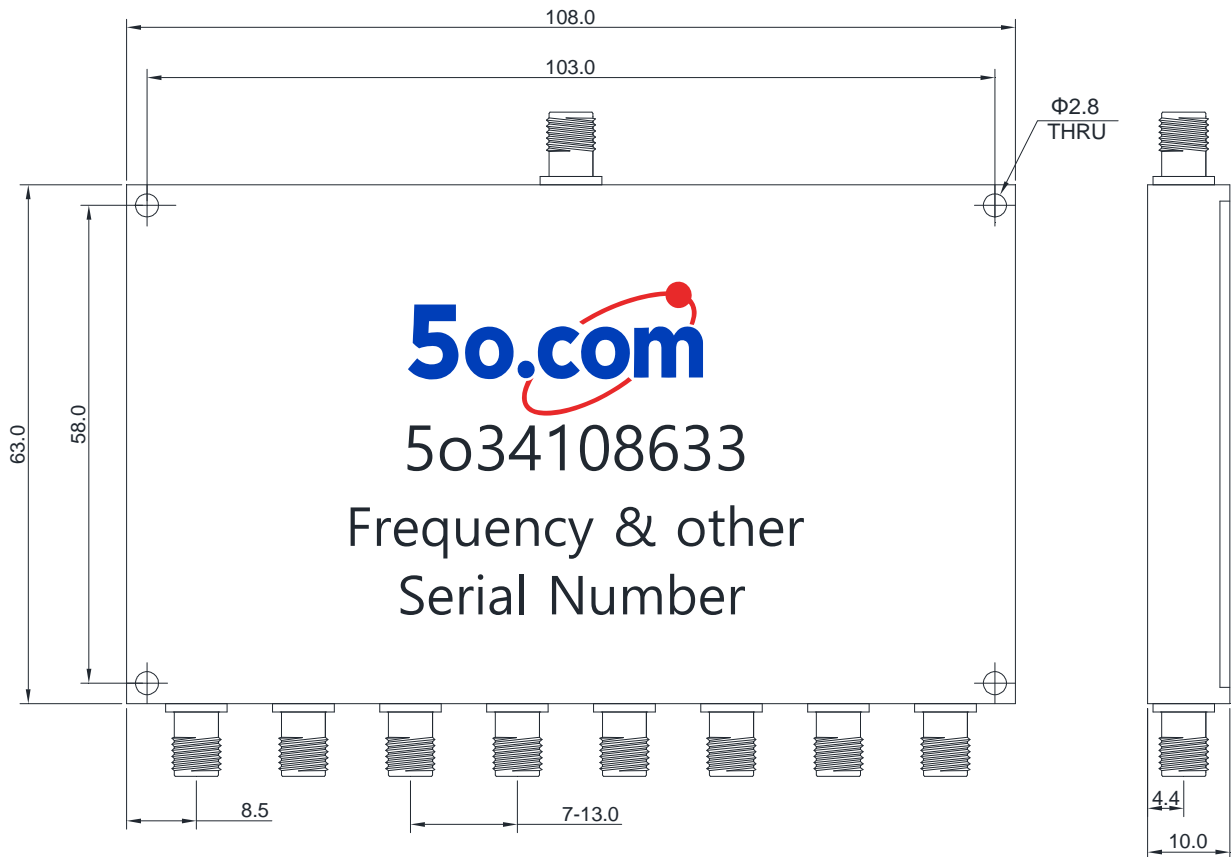

Tolerances: ±2% unless otherwise stated.