

8 Way Power Divider 500 ~ 6000MHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o341101400500T6000SK	500 ~ 6000	18	1.5	2.8(Split 9dB)	±6°	±0.5	SMA Female

Basic Specifications

Dimension	110*140*12mm	Impedance	50Ω
Splitter Power	30W	Operating Temperature	-40 ~ +85°C
Combiner Power	3W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

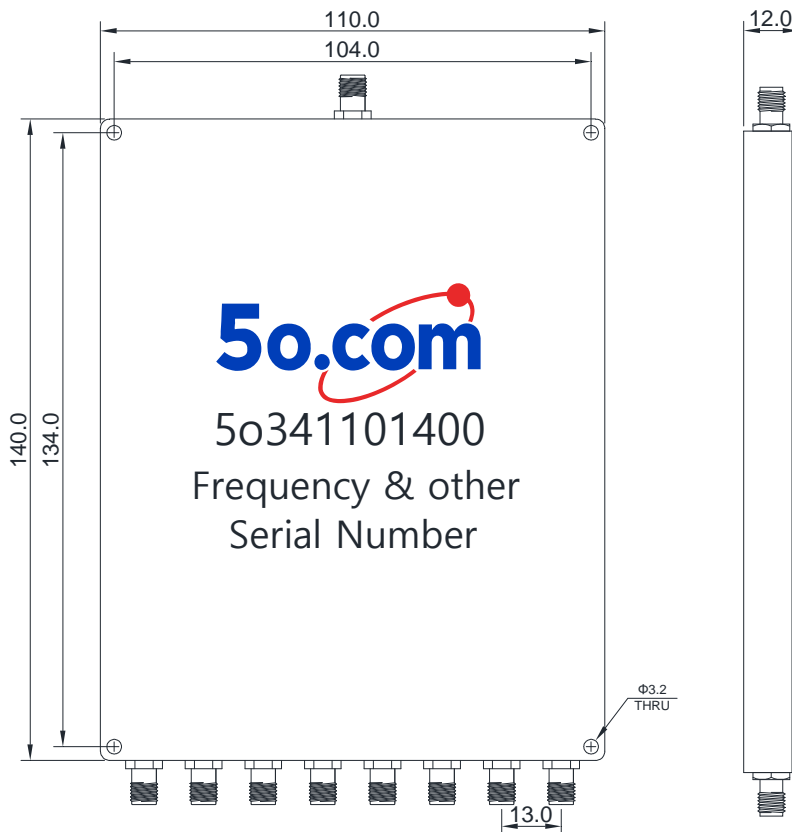

Tolerances: ±2% unless otherwise stated.