

8 Way Power Divider 5 ~ 1000MHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Input Max	VSWR Output Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o341225605T1000SK	5 ~ 1000	18	1.4	1.3	2.5(Split 6dB)	±4°	±0.5dB	SMA Female

Basic Specifications

Dimension	122*56*12mm	Impedance	50Ω
Splitter Power	10W	Operating Temperature	-40 ~ +85°C
Combiner Power	1W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

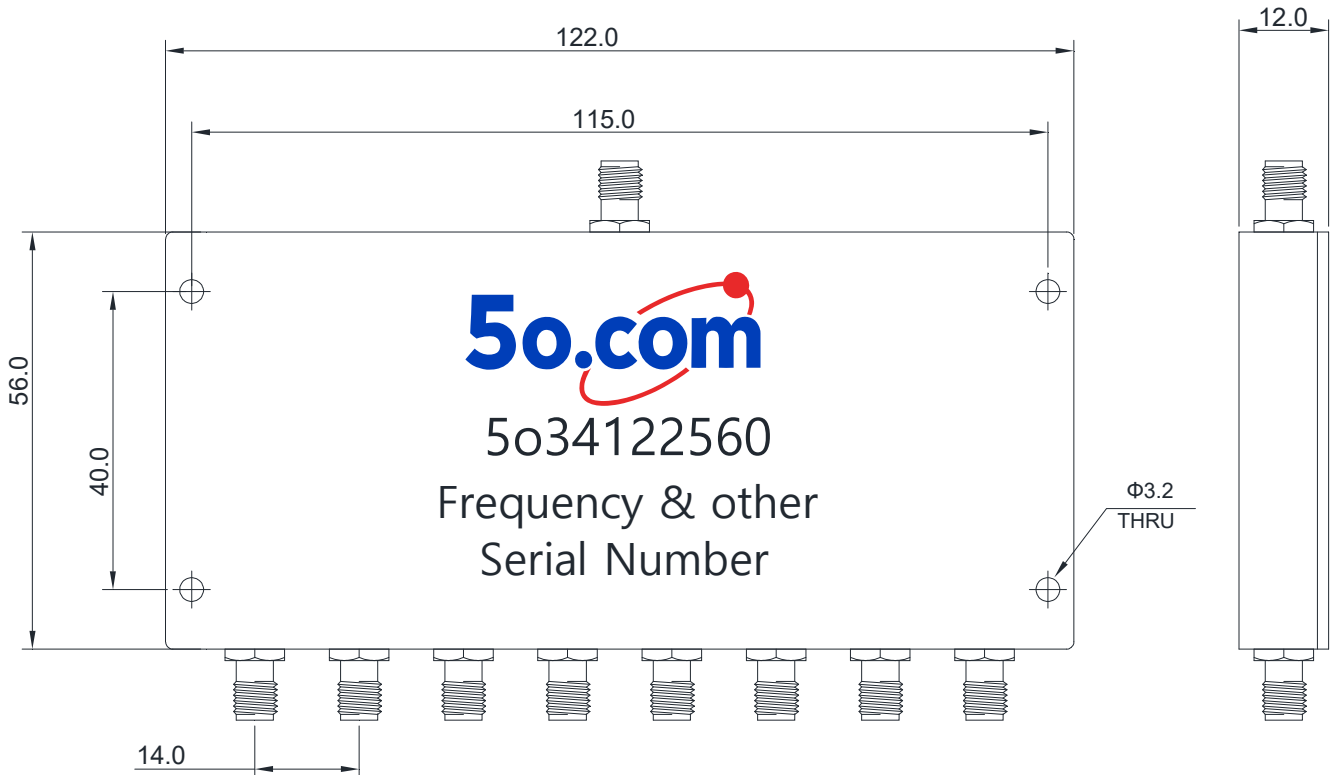

Tolerances: ±2% unless otherwise stated.