

8 Way Power Divider 698 ~ 2700MHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o341991060698T2700NK	698 ~ 2700	16	1.35	1.2(Split 9dB)	±5°	±0.8dB	N Female
5o341991060698T2700SK	698 ~ 2700	16	1.35	1.2(Split 9dB)	±5°	±0.8dB	SMA Female
5o341991060800T2500NK	800 ~ 2500	16	1.35	1.2(Split 9dB)	±5°	±0.8dB	N Female
5o341991060800T2500SK	800 ~ 2500	16	1.35	1.2(Split 9dB)	±5°	±0.8dB	SMA Female
5o341991060800T2700NK	800 ~ 2700	16	1.35	1.2(Split 9dB)	±5°	±0.8dB	N Female
5o341991060800T2700SK	800 ~ 2700	16	1.35	1.2(Split 9dB)	±5°	±0.8dB	SMA Female

Basic Specifications

Dimension	199*106.2*21.5mm	Impedance	50Ω
Splitter Power	50W	Operating Temperature	-40 ~ +85°C
Combiner Power	2W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

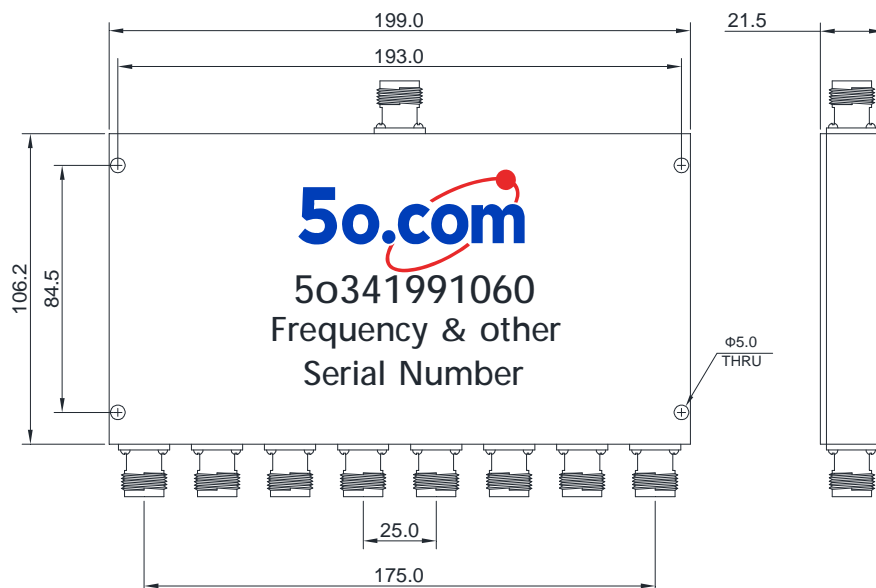

Tolerances: ±2% unless otherwise stated.