

8 Way Power Divider 100 ~2000MHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Input Max	VSWR Output Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o342202250100T2000SK	100 ~ 2000	18	1.4	1.3	4.0(Split 6dB)	±4°	±0.5dB	SMA Female

Basic Specifications

Dimension	220*225*11mm	Impedance	50Ω
Splitter Power	30W	Operating Temperature	-40 ~ +85°C
Combiner Power	2W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

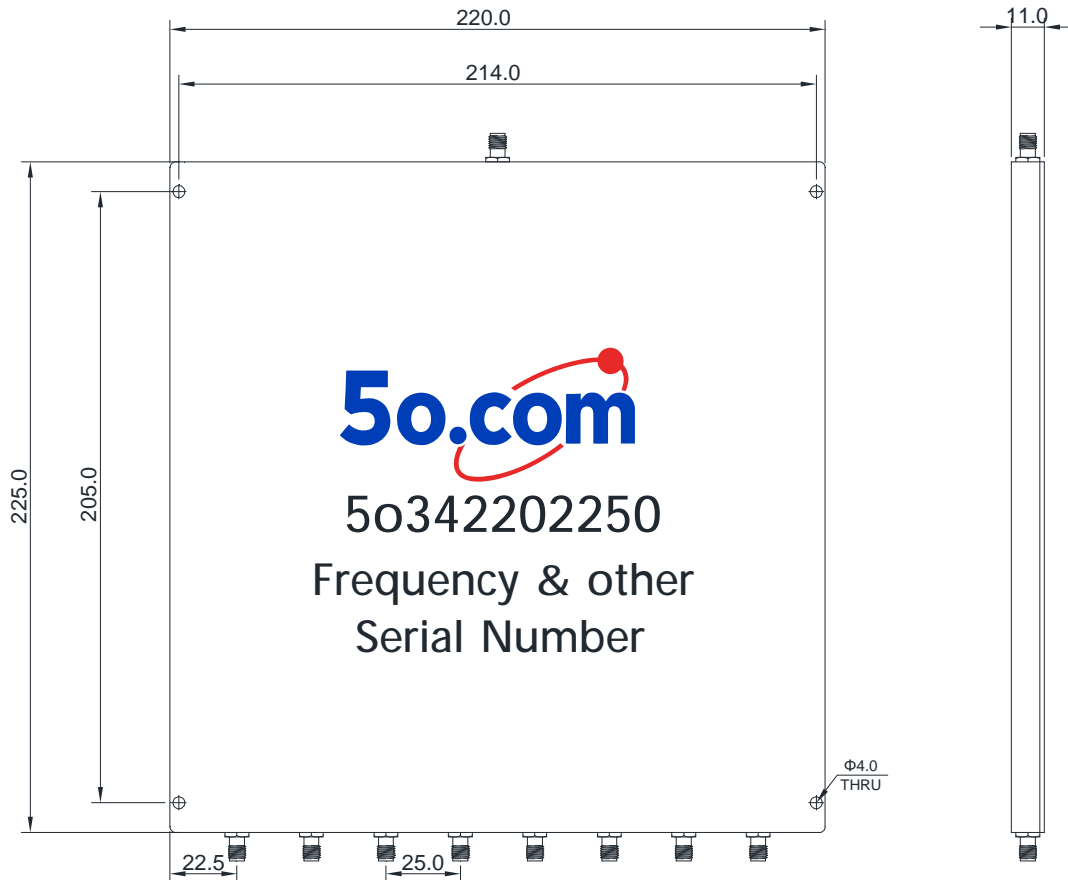

Tolerances: ±2% unless otherwise stated.