

3 TX Combiner 330 ~ 520MHz

Application

- ▶ Base Stations & Antenna feeds.
- ▶ Military, Space and Commercial applications.
- ▶ Remote control and Internet of Things devices.
- ▶ It supports a one-year standard warranty.


RF Characteristics

| Part Number | Frequency Range (MHz) | Frequency Separation | Insertion Loss(dB) | Isolation Min(dB) | VSWR Max |
|------------------------|-----------------------|----------------------|--------------------|---------------------------------------|--|
| 5o3463303200xxxxxxxxNK | 330 ~ 520 | ≥250 KHz | 2.6 ~ 3.8dB | 65dB Min. @TX-TX 55dB Min. @ANT-TX | 1.25:1 Max. @Input 1.5:1 Max. @Output |

Basic Specifications

| | |
|-----------------------|-----------------------------------|
| Number of Channels | N Female @3xTX N Female @1xANT |
| Input Power | 50W |
| Tuning Range | 5MHz |
| Dimension | 330*320*500mm |
| Operating Temperature | -10~+65°C |
| Storage Temperature | -55~+125°C |

Overall Dimension(mm)

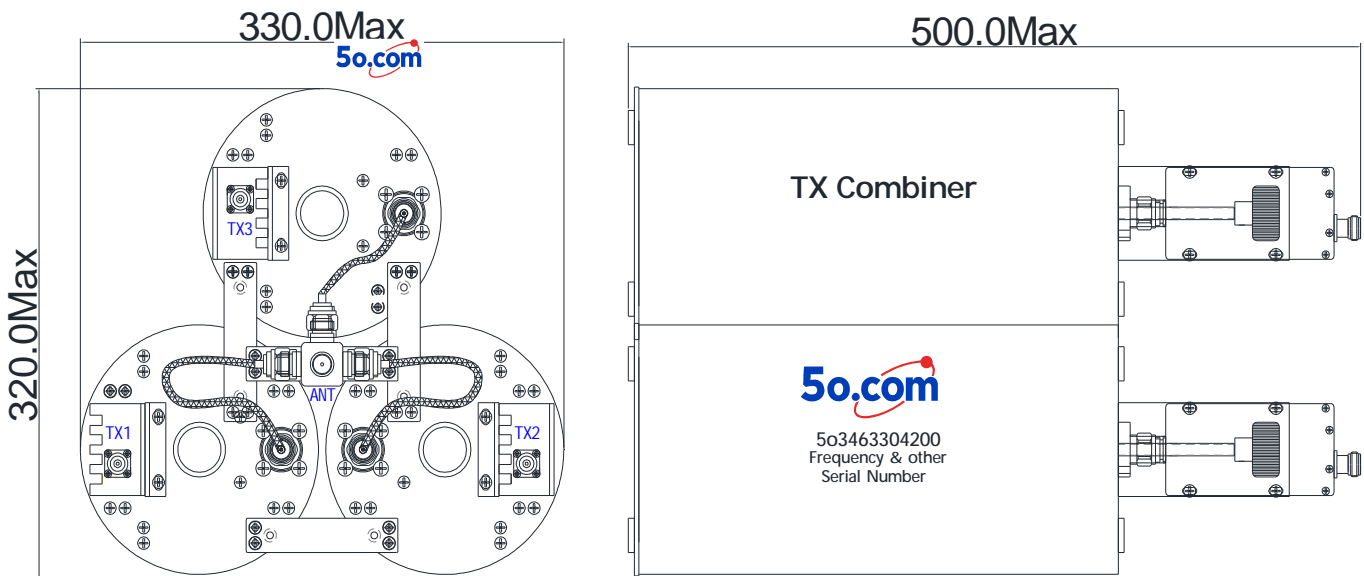

Tolerances: ±2% unless otherwise stated.