

16 Way Power Divider 400 ~ 6000MHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)	VSWR Input Max	VSWR Output Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o3623514004004000SK	0.4 ~ 4.0	18	1.8	1.3	2.5(Split 12dB)	±15°	±1.5dB	SMA Female
5o3623514005006000SK	0.5 ~ 6.0	18	1.6	1.5	5.5(Split 12dB)	±15°	±1.0dB	SMA Female

Basic Specifications

Dimension	235*140*12mm	Impedance	50Ω
Splitter Power	10W	Operating Temperature	-55 ~ +85°C
Combiner Power	3W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

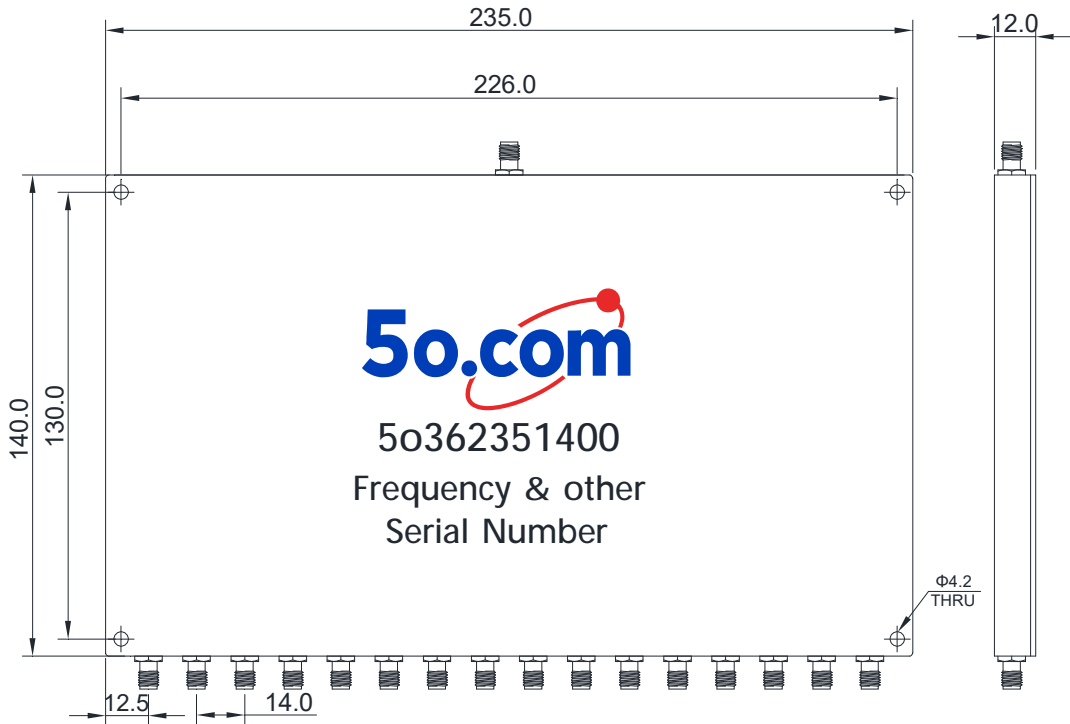

Tolerances: ±2% unless otherwise stated.