

3 way Combiner / Hybrid Coupler 400 ~ 470MHz

Application

- ▶ Multi-system shared antenna feed system..
- ▶ Base station and repeater system.
- ▶ Indoor distribution system.
- ▶ Radio intercom system.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type	Power (W)
5o3T150304801400470NK	400 ~ 470	0.7 (Coupling 4.8dB)	25	1.3	N Female	200(3x66)
5o3T150304801400470SK	400 ~ 470	0.7 (Coupling 4.8dB)	25	1.3	SMA Female	100(3x33)

Basic Specifications

Dimension	304*80*50mm	Operating Temperature	-40 ~ +85°C
Impedance	50Ω	Storage Temperature	-55~+125°C

Overall Dimension(mm)

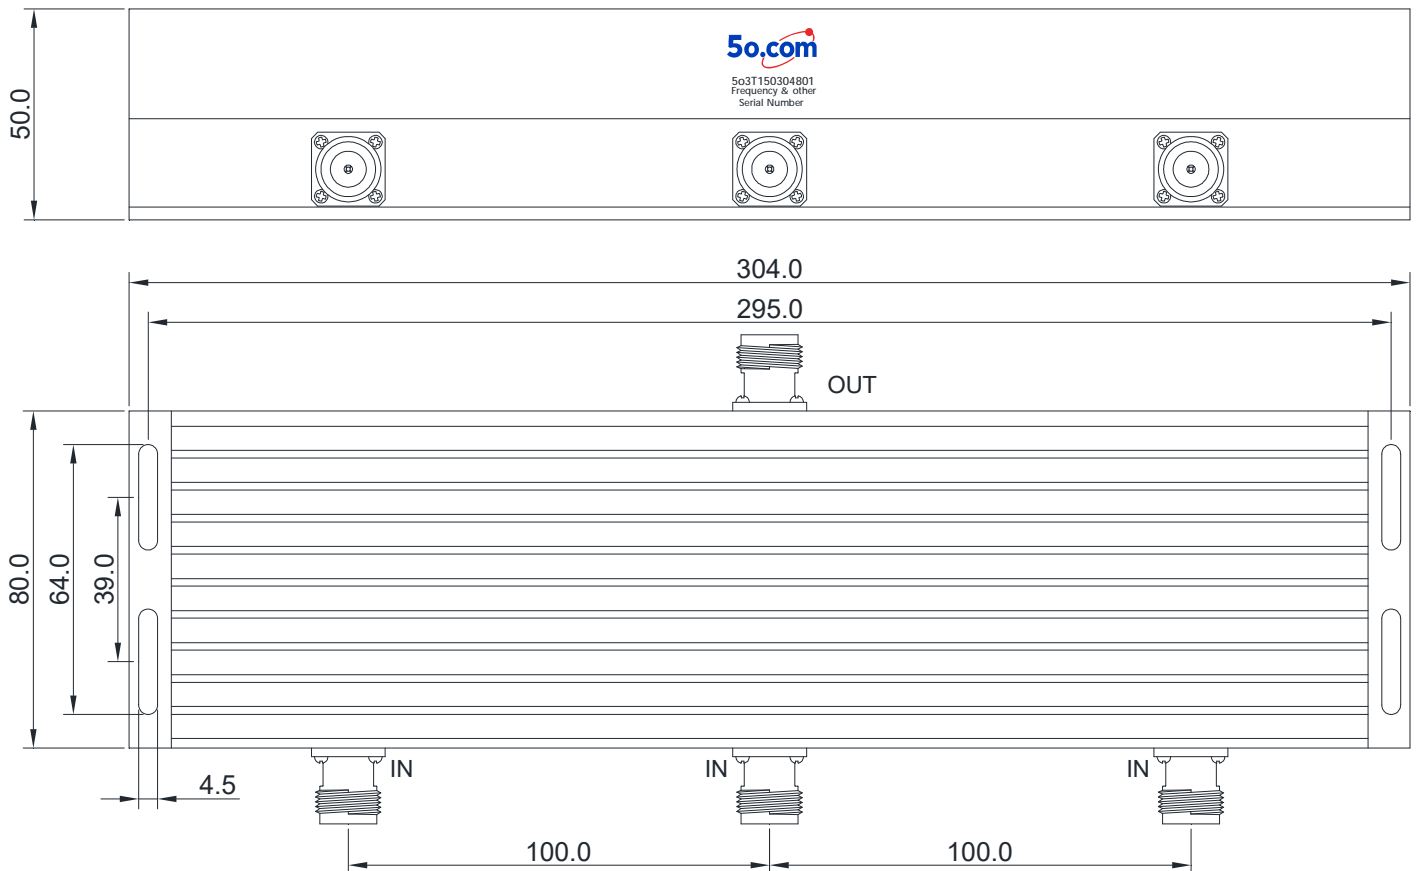

Tolerances: ±2% unless otherwise stated.