

Duplexer 1710 ~ 1880MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Connector Type
5o4010065017101880SK	CH1	1805 ~ 1880	60	1.5	2.0	1.3	SMA Female
	CH2	1710 ~ 1785					
5o4010065017101880NK	CH1	1805 ~ 1880	60	1.5	2.0	1.3	N Female
	CH2	1710 ~ 1785					

Basic Specifications

Dimension	100*65*32mm	Impedance	50Ω
Power	5W	Operating Temperature	-20 ~ +65°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

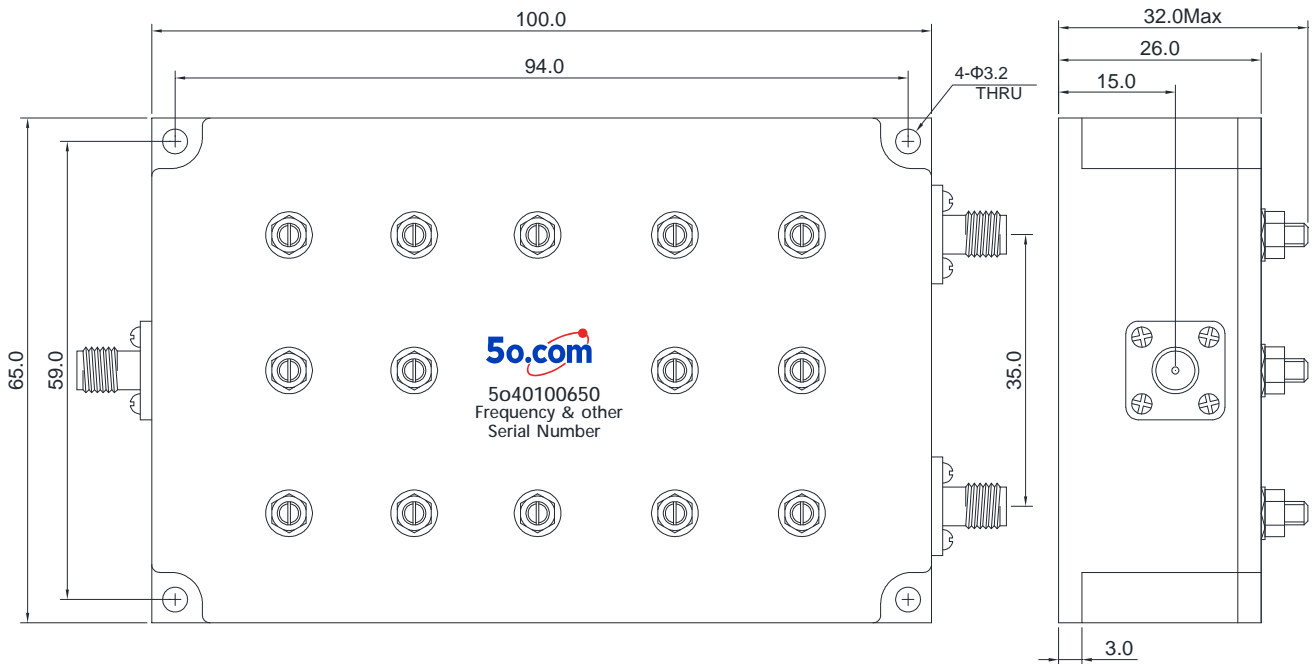

Tolerances: ±2% unless otherwise stated