

Duplexer 2700 ~ 3200MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power(W)	Connector Type
5o4010076027003200SK	CH1	3100~3200	70	0.7	1.3	100	SMA Female
	CH2	2700~2900					
5o4010076027003200NK	CH1	3100~3200	70	0.7	1.3	100	N Female
	CH2	2700~2900					

Basic Specifications

Dimension	100*76*32mm	Impedance	50Ω
Power	100W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

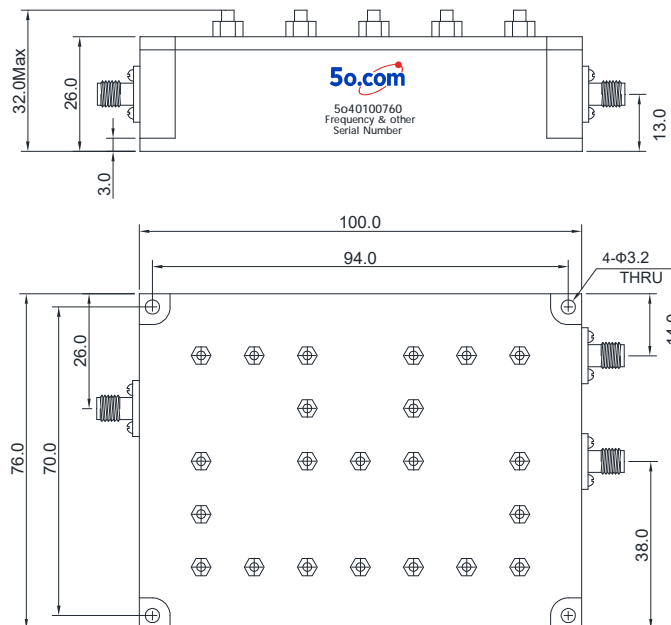

Tolerances: ±2% unless otherwise stated