

Duplexer 1920 ~ 2170MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min (dB)	Ripple Max (dB)	Insertion Loss Max (dB)	VSWR Max	Connector Type
5o4010077019202170SK	CH1	1920 ~ 1990	75	0.3	0.5	1.22	SMA Female
	CH2	2110 ~ 2170			0.6		
5o4010077019202170NK	CH1	1920 ~ 1990	75	0.3	0.5	1.22	N Female
	CH2	2110 ~ 2170			0.6		

Basic Specifications

Dimension	100*77*38.5mm	Impedance	50Ω
Power	60W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

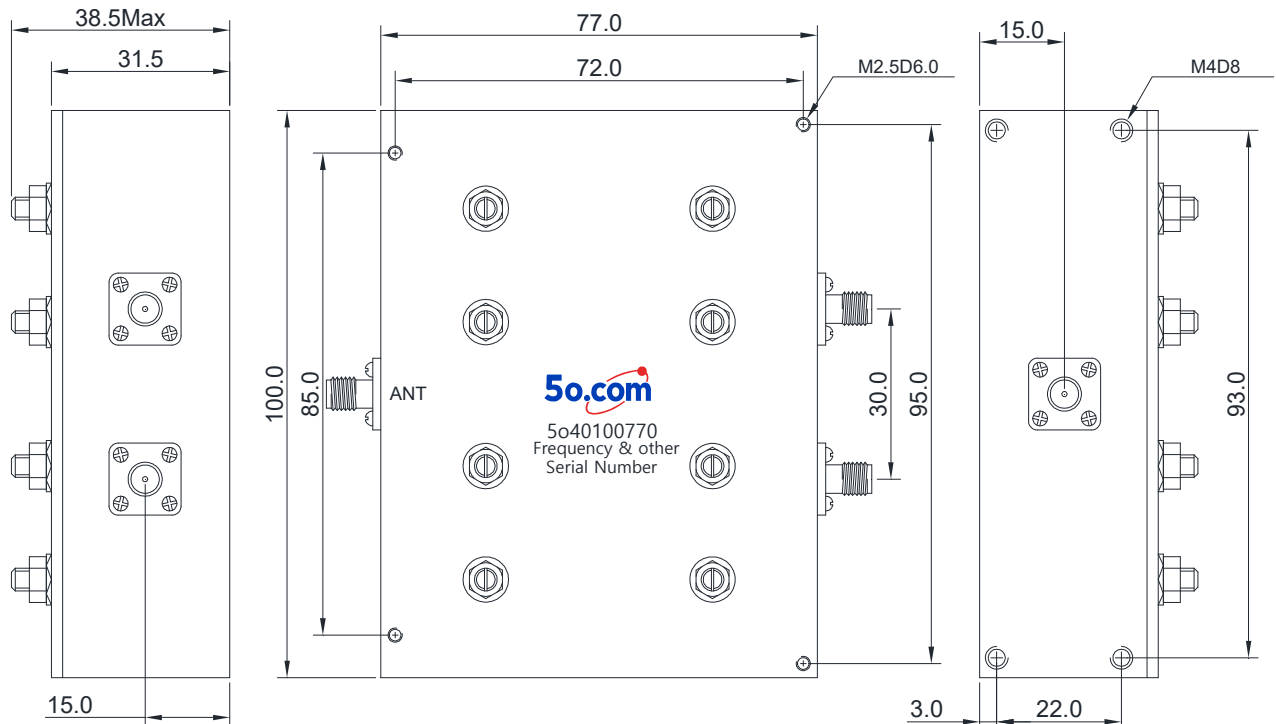

Tolerances: ±2% unless otherwise stated