

Duplexer 344 ~ 396MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
	CH1	CH2						
5o401022000344396SK	CH1	344 ~ 351	50	0.5	1.0	1.3	10	SMA Female
	CH2	381 ~ 396						
5o401022000344396NK	CH1	344 ~ 351	50	0.5	1.0	1.3	10	N Female
	CH2	381 ~ 396						

Basic Specifications

Dimension	102*200*65mm	Impedance	50Ω
Power	10W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

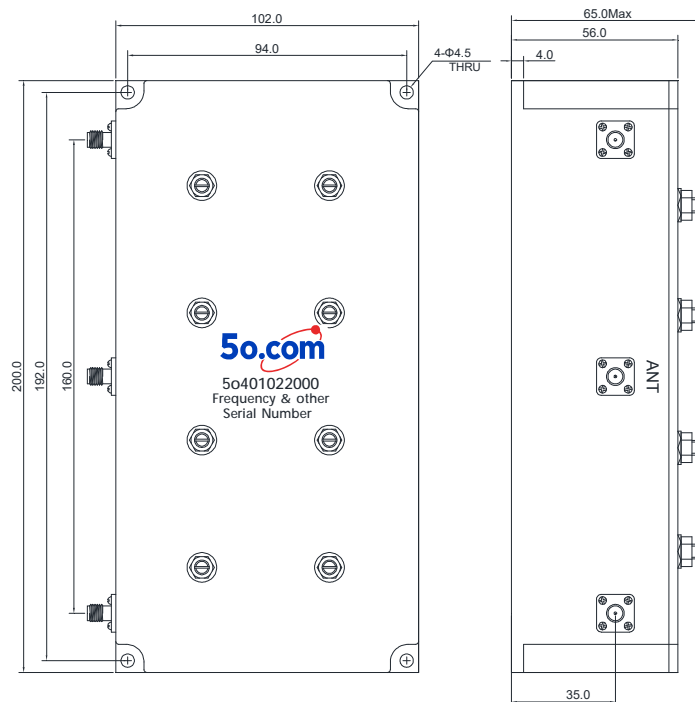

Tolerances: ±2% unless otherwise stated.