Duplexer 2500~ 2690MHz

Application

- ▶Mobile communication system.
- ▶Public safety and emergency communication.
- ▶Military, space and commercial applications.
- ▶It can be customized according to customer requirements.
- ▶It supports a one-year standard warranty.

RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Passband Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Connector Type
5o40107107025002690SK	CH1	2500 ~ 2570	85	0.8	1.5	1.22	SMA Female
	CH2	2620 ~ 2690					
5o40107107025002690NK	CH1	2500 ~ 2570	85	0.8	1.5	1.22	N Female
	CH2	2620 ~ 2690					

Basic Specifications

Dimension	107*107*30mm	Impedance	50Ω
Power	100W	Operating Temperature	-30 ~ +70℃
Appearance Color	Black	Storage Temperature	-55~+125℃

Overall Dimension(mm)

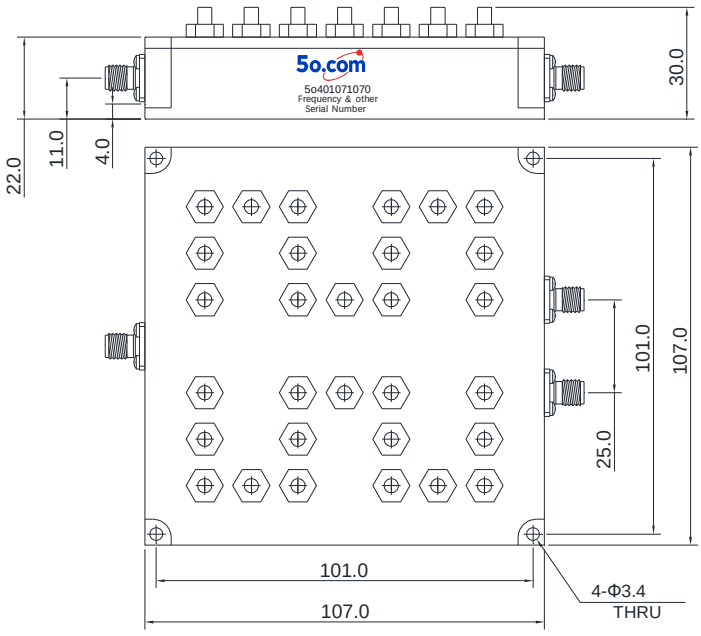

Tolerances: ±2% unless otherwise stated.