

Duplexer 1662 ~ 1667MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o40121175016621667NK	CH1	1662	50	3.0	1.3	50	N Female
	CH2	1667					

Basic Specifications

Dimension	121*175*35mm	Impedance	50Ω
Power	50W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

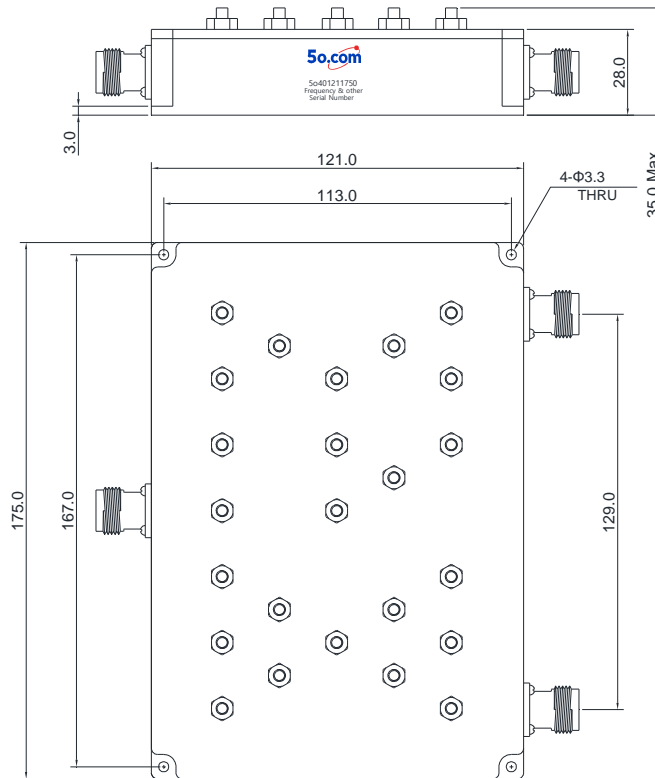

Tolerances: ±2% unless otherwise stated.