

Duplexer 450 ~ 1520MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Connector Type
5o4014011004501520SK	CH1	450 ~ 530	80	0.4	0.5	1.25	SMA Female
	CH2	1420 ~ 1520					
5o4014011004501520NK	CH1	450 ~ 530	80	0.4	0.5	1.25	N Female
	CH2	1420 ~ 1520					

Basic Specifications

Dimension	110*140*49mm	Impedance	50Ω
Power	100W	Operating Temperature	-55 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

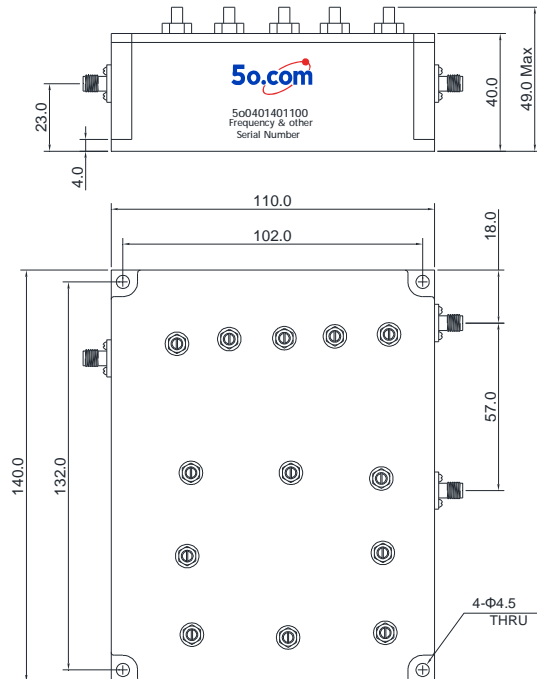

Tolerances: ±2% unless otherwise stated.