

Duplexer 850 ~ 1990MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o401406508501990SK	CH1	850 ~ 960	80	1.0	1.5	100W	SMA Female
	CH2	1700 ~ 1990					
5o401406508501990NK	CH1	850 ~ 960	80	1.0	1.5	100W	N Female
	CH2	1700 ~ 1990					

Basic Specifications

Dimension	140*65*47mm	Impedance	50Ω
Power	100W	Operating Temperature	-40 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

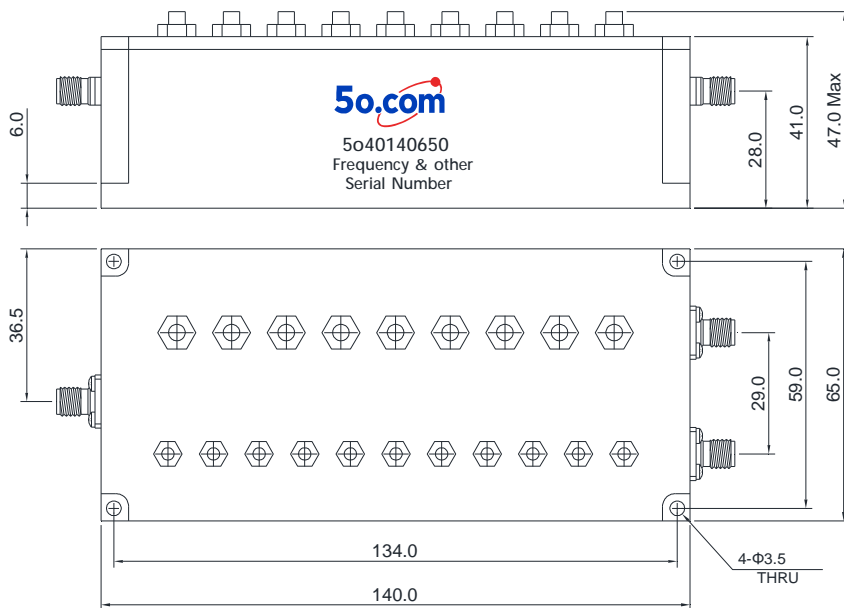

Tolerances: ±2% unless otherwise stated