

Duplexer 151 ~ 160MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Connector Type
5o401483100151160SK	CH1	151.06~154.125	65	0.6	1.0	1.35	SMA Female
	CH2	158.765~160.09					
5o401483100151160NK	CH1	151.06~154.125	65	0.6	1.0	1.35	N Female
	CH2	158.765~160.09					

Basic Specifications

Dimension	148*310*156mm	Impedance	50Ω
Power	50W	Operating Temperature	-20 ~ +65°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

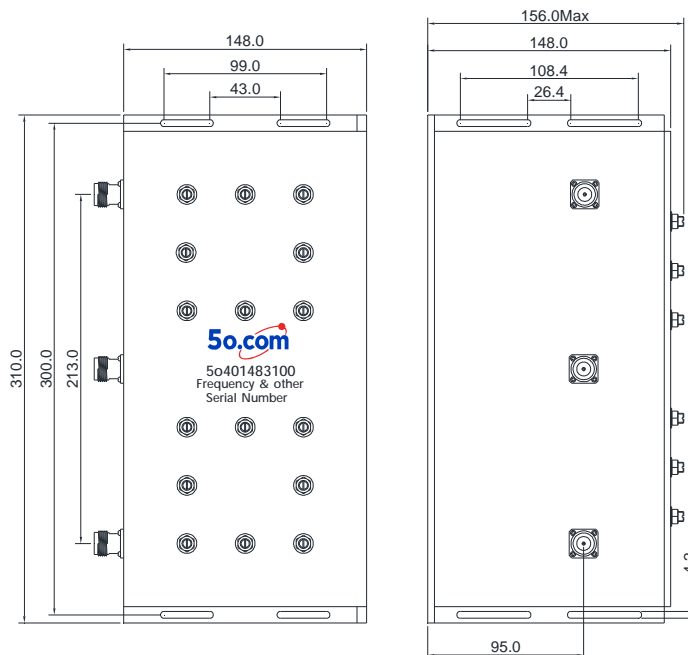

Tolerances: ±2% unless otherwise stated.