

Duplexer 850 ~ 1610MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	Return Loss Min(dB)	Connector Type
5o401507508501610SK	CH1	850 ~ 980	30	0.6	0.8	16	SMA Female
	CH2	1150 ~ 1610					
5o401507508501610NK	CH1	850 ~ 980	30	0.6	0.8	16	N Female
	CH2	1150 ~ 1610					

Basic Specifications

Dimension	150*75*43mm	Impedance	50Ω
Power	75W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

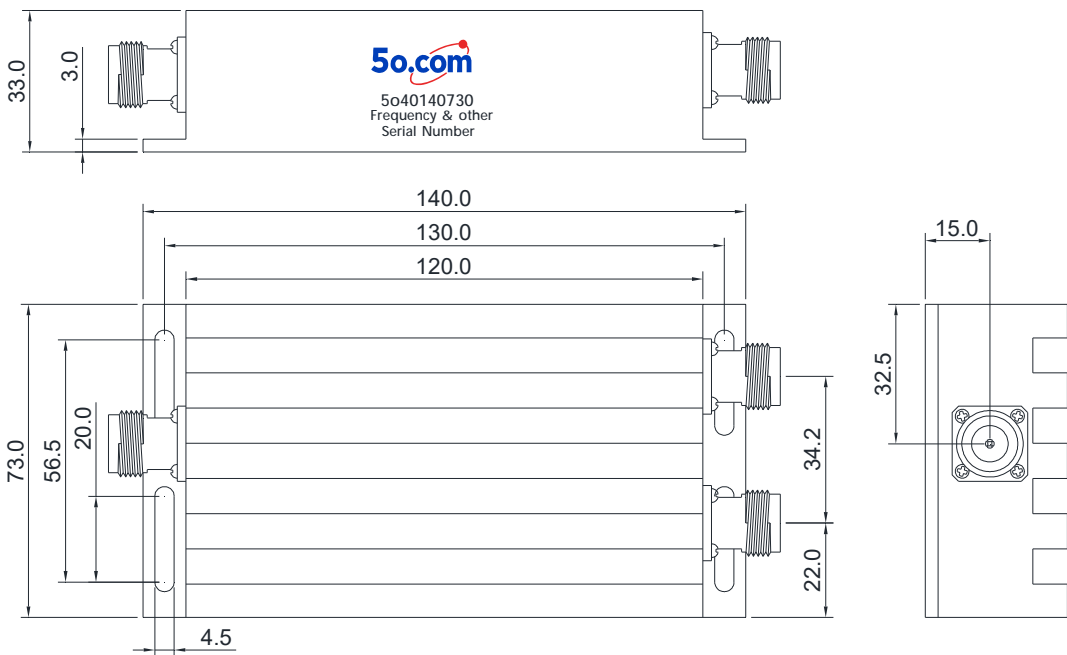

Tolerances: ±2% unless otherwise stated