

Duplexer 405 ~ 470MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Connector Type
5o401661250405470NK	CH1	455 ~ 470	80	0.5	1.0	1.3	N Female
	CH2	405 ~ 419					
5o401661250405470SK	CH1	455 ~ 470	80	0.5	1.0	1.3	SMA Female
	CH2	405 ~ 419					

Basic Specifications

Dimension	166*125*67mm	Impedance	50Ω
Power	100W	Operating Temperature	-20 ~ +60°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

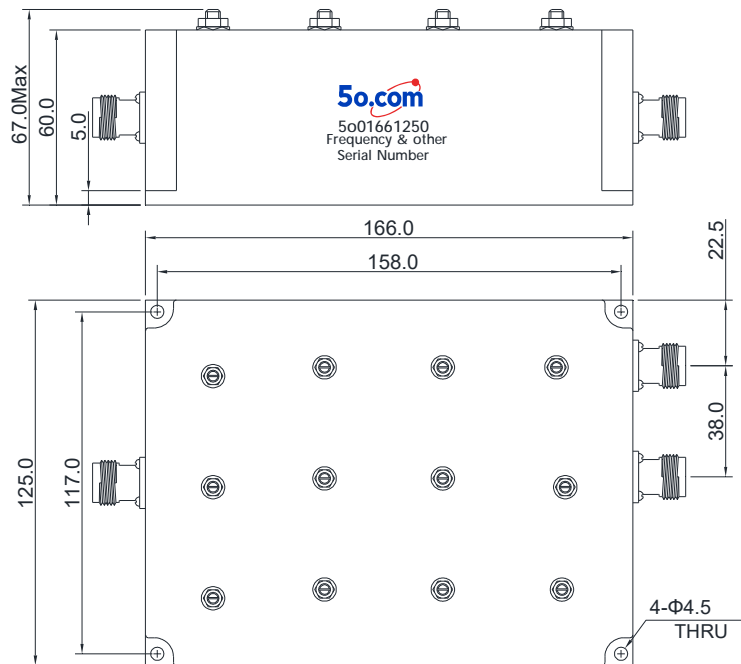

Tolerances: ±2% unless otherwise stated.