

Duplexer 600 ~ 2200MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type
5o401701250699756SK	CH1	729 ~ 746	80	1.5	50dB @803~5000MHz	1.3	SMA Female
	CH2	699 ~ 716			50dB @DC~652MHz		
5o40170125019202170SK	CH1	2110~2170	80	1.5	50dB @2300~5000MHz	1.3	SMA Female
	CH2	1920~1980			50dB @DC~1805MHz		
5o40170125019202170NK	CH1	2110~2170	80	1.5	50dB @2300~5000MHz	1.3	N Female
	CH2	1920~1980			50dB @DC~1805MHz		

Basic Specifications

Dimension	170*125*43mm	Impedance	50Ω
Power	20W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

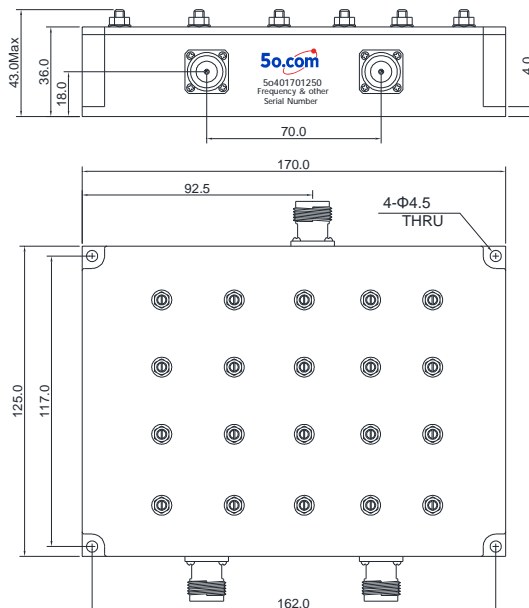

Tolerances: ±2% unless otherwise stated.