

Duplexer 488.4 ~493.6MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Connector Type
5o40181297048844936SK	CH1	491.4375~493.6125	75	4.0	5.0	1.3	SMA Female
	CH2	488.4375~490.6125					
5o40181297048844936NK	CH1	491.4375~493.6125	75	4.0	5.0	1.3	N Female
	CH2	488.4375~490.6125					

Basic Specifications

Dimension	181*297*80mm	Impedance	50Ω
Power	50W	Operating Temperature	-10 ~ +50°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

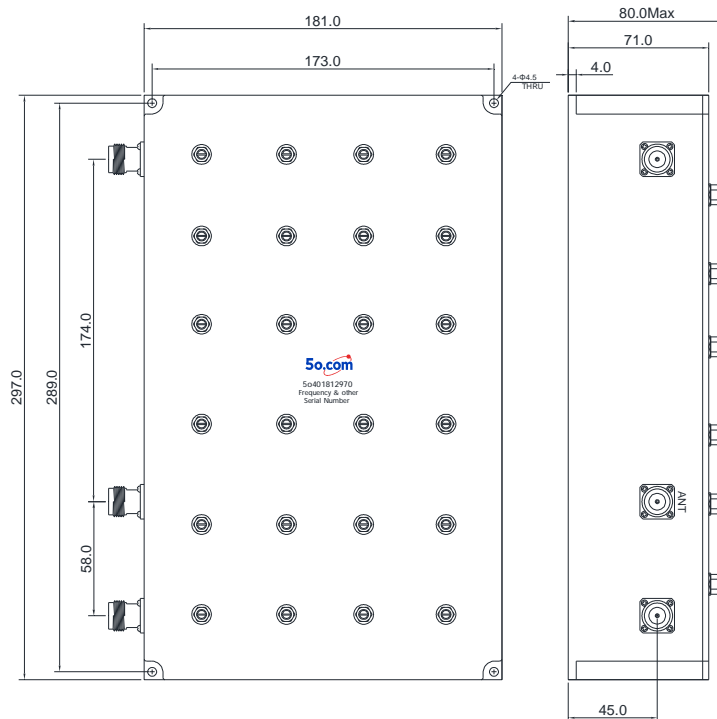

Tolerances: ±2% unless otherwise stated.