

Duplexer 1275 ~ 13129MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o401848401275113129 SKTWR75	CH1	12751~12863	70	1.5	1.3	20	SMA Female @TX & RX WR75 @ANT
	CH2	13017~13129					

Basic Specifications

Dimension	184*82*19.5mm	Impedance	50Ω
Power	20W	Operating Temperature	-40 ~ +70°C
Appearance Color	Grey	Storage Temperature	-55~+125°C

Overall Dimension(mm)

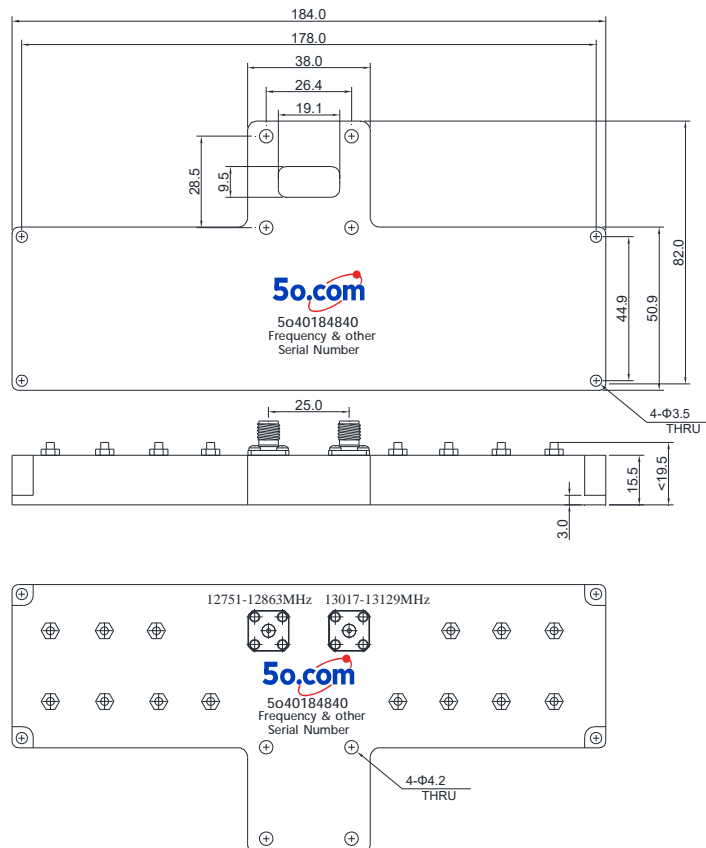

Tolerances: ±2% unless otherwise stated.