

## Duplexer 380 ~ 470MHz

### Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


### RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o40193830380470NK	CH1	380 ~ 395	70	1.5	1.4	100	N Female
	CH2	450 ~ 470					
5o40193830380470SK	CH1	380 ~ 395	70	1.5	1.4	100	SMA Female
	CH2	450 ~ 470					

### Basic Specifications

Dimension	193*83*68mm	Impedance	50Ω
Power	100W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

### Overall Dimension(mm)

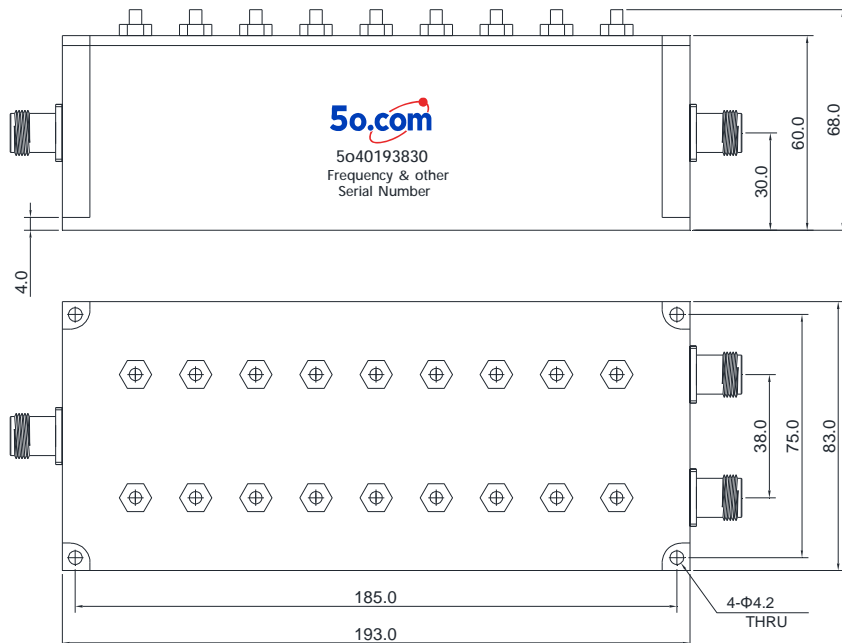

Tolerances: ±2% unless otherwise stated.