

Duplexer 1521 ~ 1529MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o40200102015211529SK	CH1	1521	80	2.2	1.3	50	SMA Female
	CH2	1529					
5o40200102015211529NK	CH1	1521	80	2.2	1.3	50	N Female
	CH2	1529					

Basic Specifications

Dimension	200*102*43mm	Impedance	50Ω
Power	50W	Operating Temperature	-20 ~ +65°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

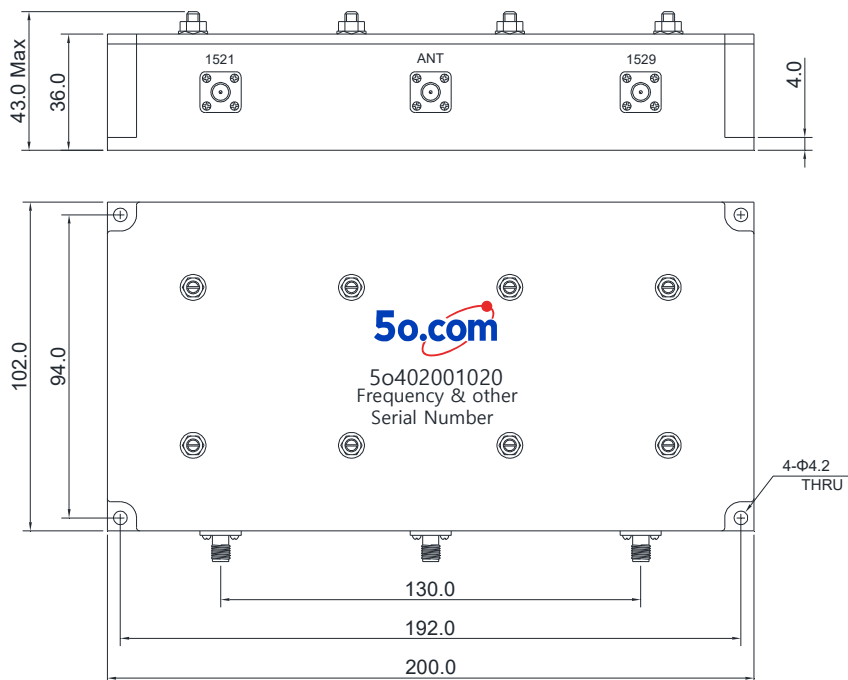

Tolerances: ±2% unless otherwise stated.