Duplexer 300 ~ 380MHz

Application

▶Mobile communication system.
▶Public safety and emergency communication.
▶Military, space and commercial applications.
▶It can be customized according to customer requirements.
▶It supports a one-year standard warranty.

RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Phase Consistency	Connector Type
5o402752000300380DK	CH1	300 ~ 320	75	0.4	0.5	1.3	≤2°	7/16 Female
	CH2	360 ~ 380					≤2°	
5o402752000300380NK	CH1	300 ~ 320	75	0.4	0.5	1.3	≤2°	N Female
	CH2	360 ~ 380					≤2°	

Basic Specifications

Dimension	275*200*85mm	Impedance	50Ω
Power	TX 400W RX 10W	Operating Temperature	-25 ~ +55℃
Appearance Color	Black	Storage Temperature	-55~+125℃

Overall Dimension(mm)

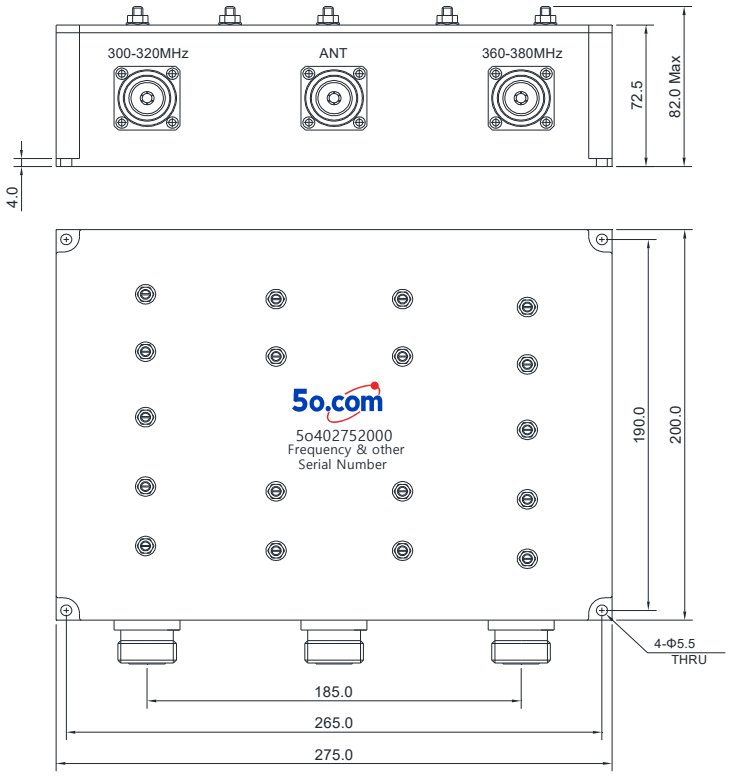

Tolerances: ±2% unless otherwise stated.