

Duplexer 145 ~ 180MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o403204200145180NK	CH1	145 ~ 158	80	0.8	1.0	1.3	100	N Female
	CH2	168 ~ 180						
5o403204200145180SK	CH1	145 ~ 158	80	0.8	1.0	1.3	100	SMA Female
	CH2	168 ~ 180						

Basic Specifications

Dimension	320*420*100mm	Impedance	50Ω
Power	100W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

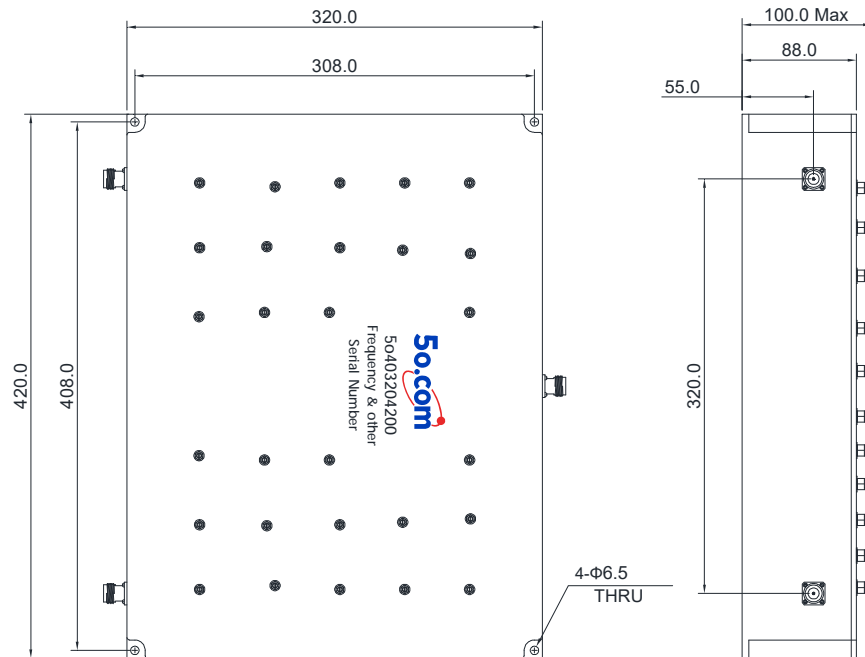

Tolerances: ±2% unless otherwise stated.