

Duplexer 380 ~ 396.6MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o4033011403803966NK	CH1	380 ~ 386.6	60	1.5	1.3	200	N Female
	CH2	390 ~ 396.6					
5o4033011403803966716K	CH1	380 ~ 386.6	60	1.5	1.3	200	7/16 Female
	CH2	390 ~ 396.6					

Basic Specifications

Dimension	330*114*79mm	Impedance	50Ω
Power	200W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

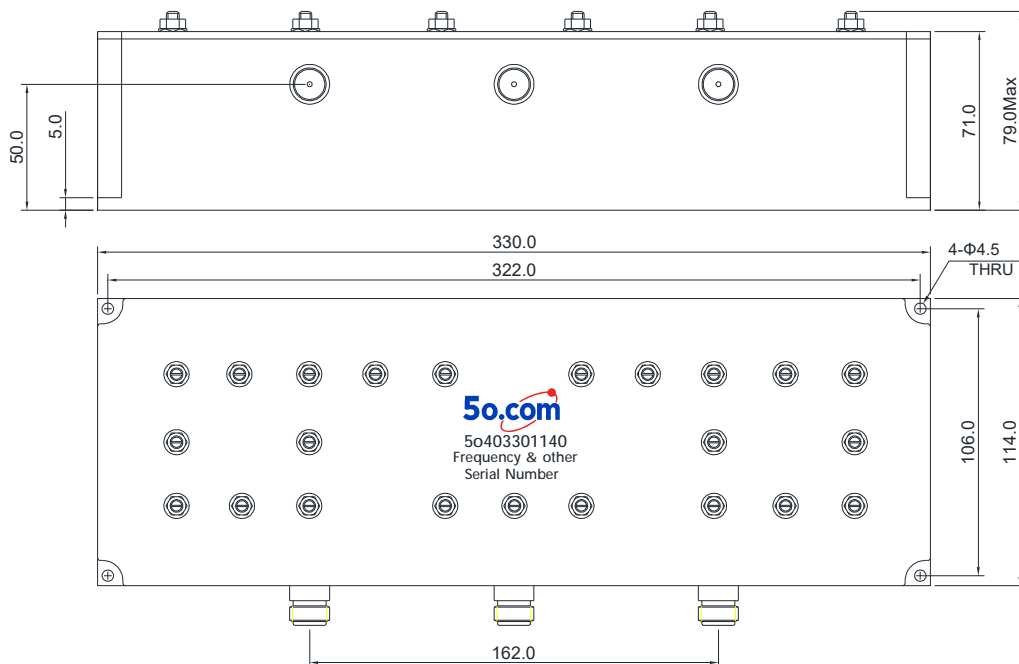

Tolerances: ±2% unless otherwise stated.