

Duplexer 244 ~ 318MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Phase Consistency	Connector Type
5o403402100244318DK	CH1	292 ~ 318	95	0.4	0.5	1.3	≤2°	7/16 Female
	CH2	244 ~ 270					≤2°	
5o403402100244318NK	CH1	292 ~ 318	95	0.4	0.5	1.3	≤2°	N Female
	CH2	244 ~ 270					≤2°	

Basic Specifications

Dimension	340*210*82mm	Impedance	50Ω
Power	400W	Operating Temperature	-25 ~ +55°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

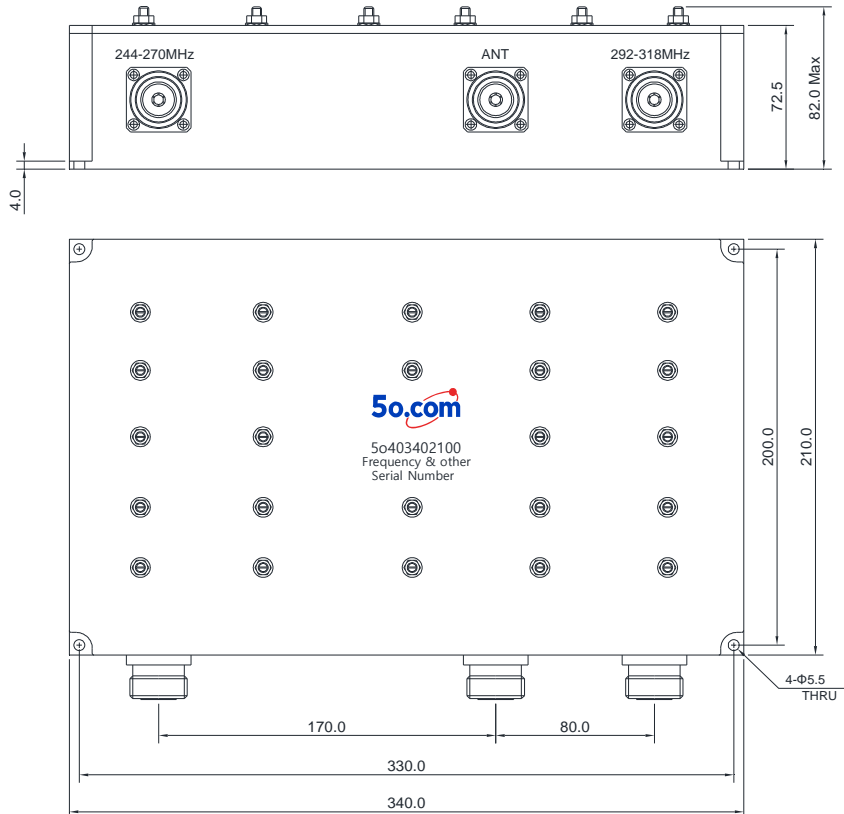

Tolerances: ±2% unless otherwise stated.