

Duplexer 448.2 ~ 469.8MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o40342174044824698NK	CH1	448.2 ~ 454.8	60	1.5	1.3	50	N Female
	CH2	463.2~469.8					
5o40342174044824698SK	CH1	448.2 ~ 454.8	60	1.5	1.3	50	SMA Female
	CH2	463.2~469.8					

Basic Specifications

Dimension	342*174*69mm	Impedance	50Ω
Power	50W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

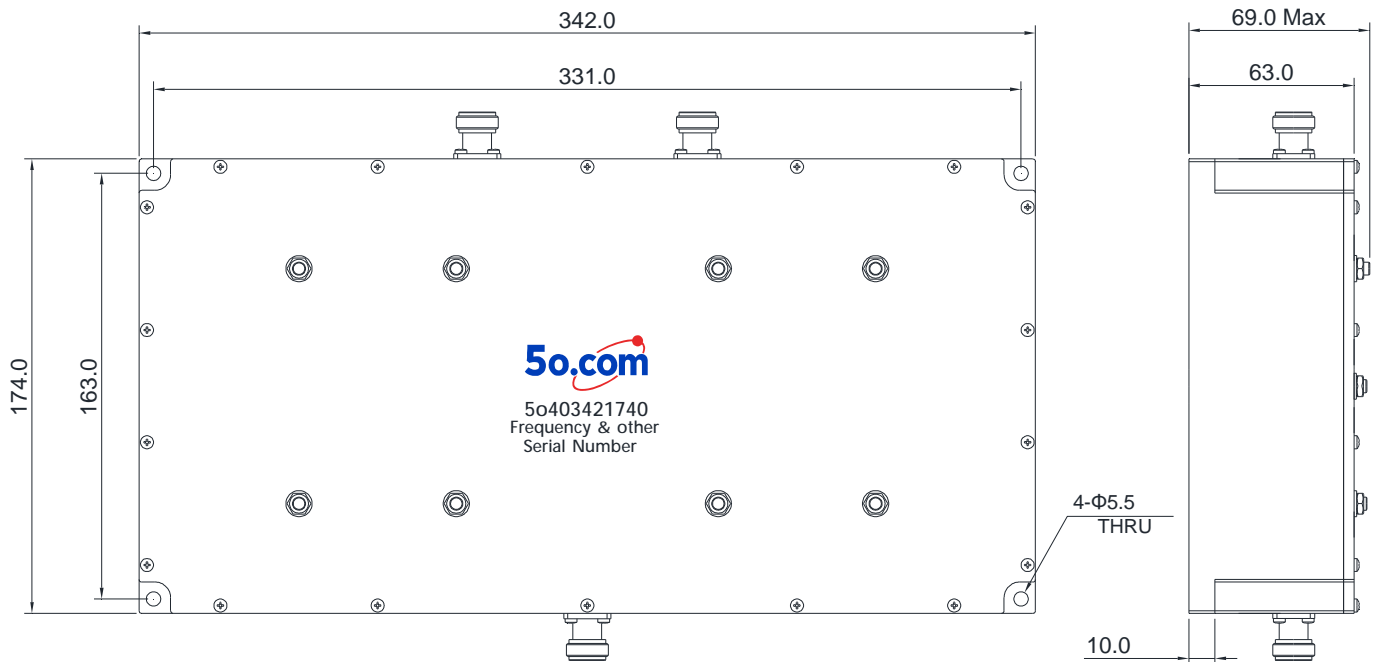

Tolerances: ±2% unless otherwise stated.