

Duplexer 45.5 ~ 103.3MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o40405304551033BK	CH1	45.5 ~ 69.0	15	3.0	1.5	2	BNC Female
	CH2	80.0 ~ 103.3					
5o40405304551033SK	CH1	45.5 ~ 69.0	15	3.0	1.5	2	SMA Female
	CH2	80.0 ~ 103.3					
5o40405304551033NK	CH1	45.5 ~ 69.0	15	3.0	1.5	2	N Female
	CH2	80.0 ~ 103.3					

Basic Specifications

Dimension	40*53*20mm	Impedance	50Ω
Power	2W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

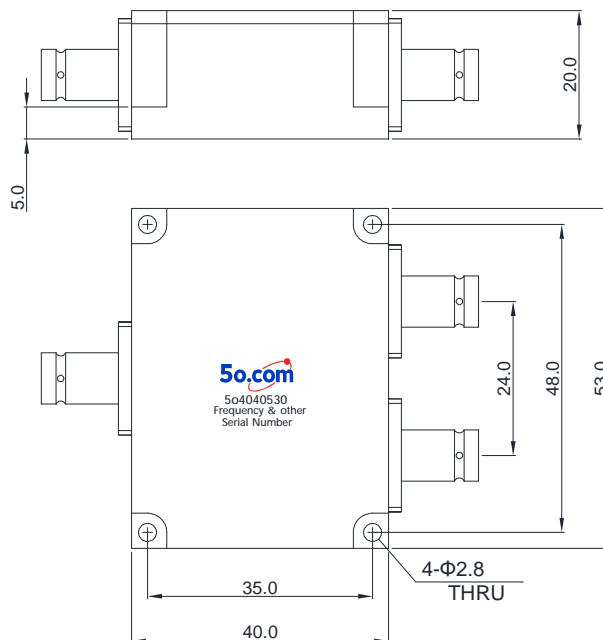

Tolerances: ±2% unless otherwise stated