

Duplexer 136 ~ 470MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o4058540136470NK	CH1	136 ~ 174	30	1.0	1.5	5	N Female
	CH2	400 ~ 470					
5o4058540136470SK	CH1	136 ~ 174	30	1.0	1.5	5	SMA Female
	CH2	400 ~ 470					

Basic Specifications

Dimension	58*54*20mm	Impedance	50Ω
Power	5W	Operating Temperature	-10 ~ +60°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

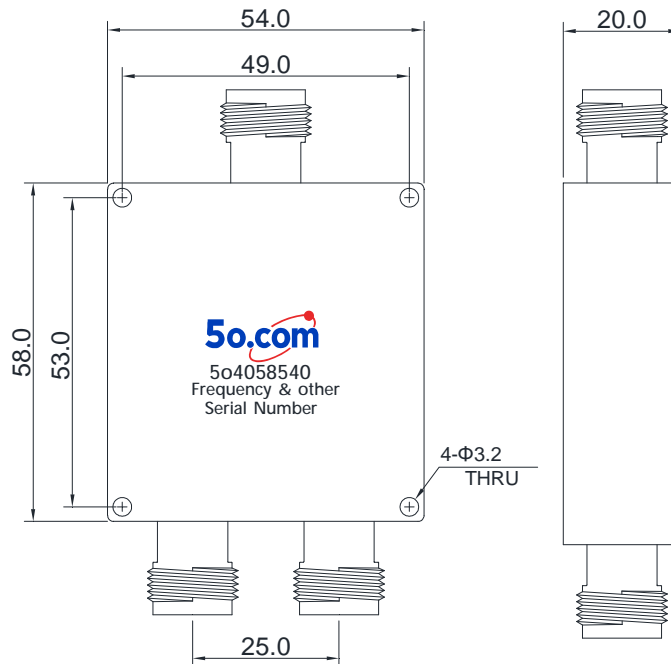

Tolerances: ±2% unless otherwise stated