

# Duplexer 1980 ~ 2200MHz

## Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Connector Type
5o4062112019802200SK	CH1	1980 ~ 2010	60	0.5	1.0	1.3	SMA Female
	CH2	2170 ~ 2200					
5o4062112019802200NK	CH1	1980 ~ 2010	60	0.5	1.0	1.3	N Female
	CH2	2170 ~ 2200					

## Basic Specifications

Dimension	62*112*43mm	Impedance	50Ω
Power	10W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

## Overall Dimension(mm)

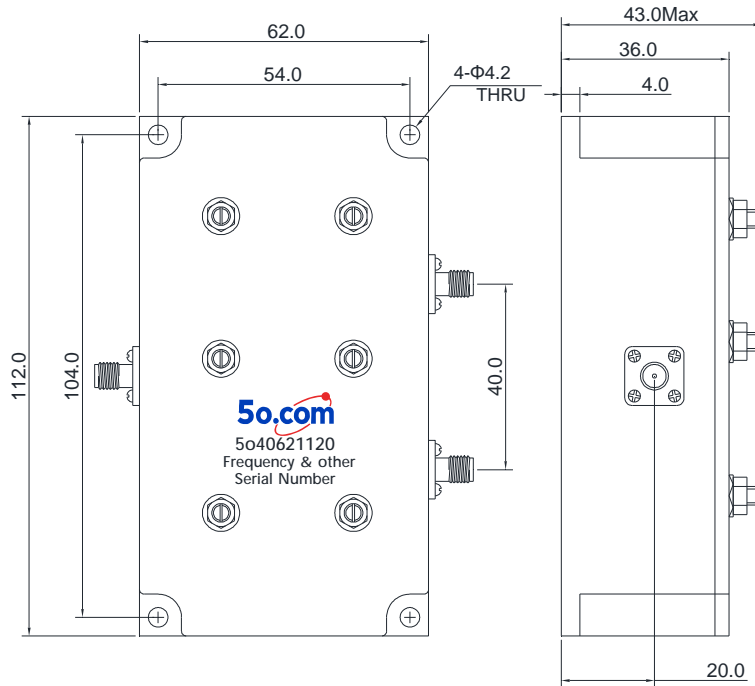

Tolerances: ±2% unless otherwise stated.