

Duplexer 7.45 ~ 13.25GHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o4067330745013250SK	CH1	7450 ~ 7900	70	1.5	1.5	20	SMA Female
	CH2	12750 ~ 13250					

Basic Specifications

Dimension	67*33*14mm	Impedance	50Ω
Power	20W	Operating Temperature	-40 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

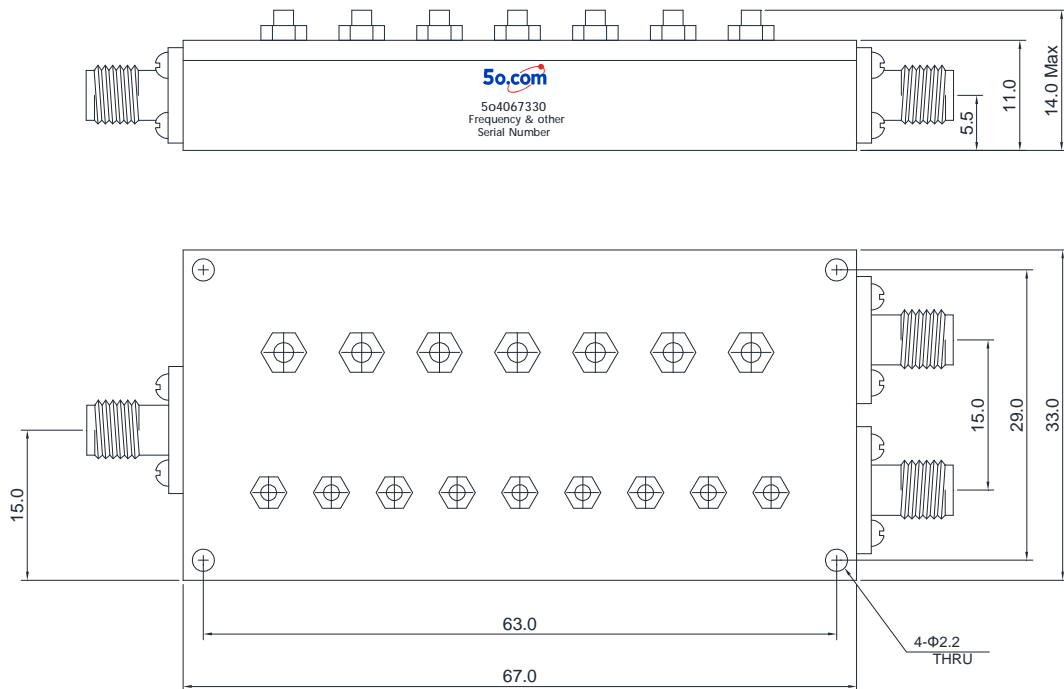

Tolerances: ±2% unless otherwise stated