

Duplexer 30 ~ 2700MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o4071910302700SK	CH1	30 ~ 520	45	0.7	0.8	1.45	50	SMA Female
	CH2	698 ~2700						
5o4071910302700NK	CH1	30 ~ 520	45	0.7	0.8	1.45	50	N Female
	CH2	698 ~2700						

Basic Specifications

Dimension	71*91*22mm	Impedance	50Ω
Power	50W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

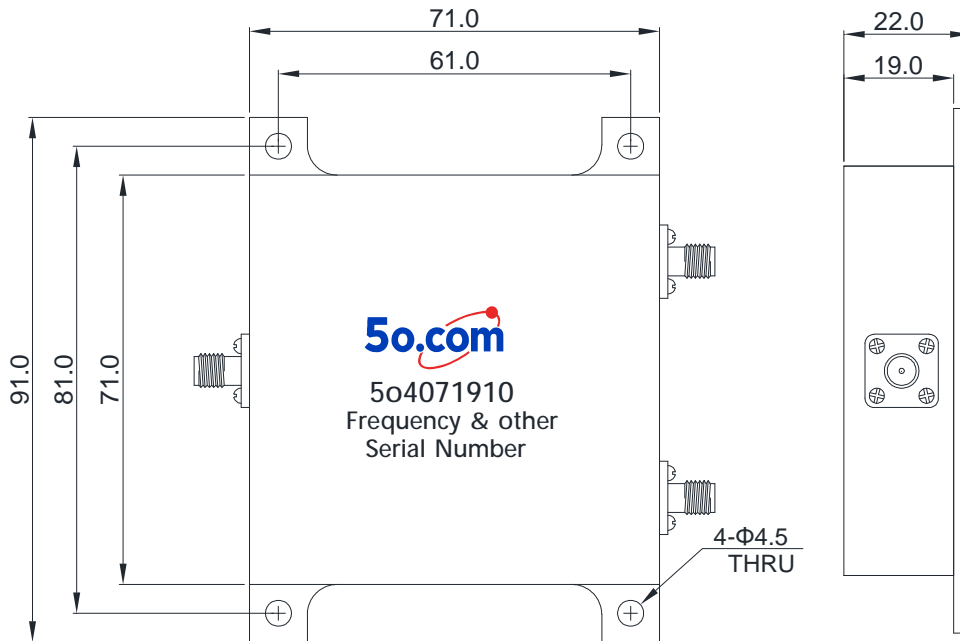

Tolerances: ±2% unless otherwise stated