

Duplexer 840 ~ 1444MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o40886208401444SK	CH1	840 ~ 845	60	0.5	1.0	1.3	50	SMA Female
	CH2	1430 ~ 1444						
5o40886208401444NK	CH1	840 ~ 845	60	0.5	1.0	1.3	50	N Female
	CH2	1430 ~ 1444						

Basic Specifications

Dimension	88*62*43mm	Impedance	50Ω
Power	50W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

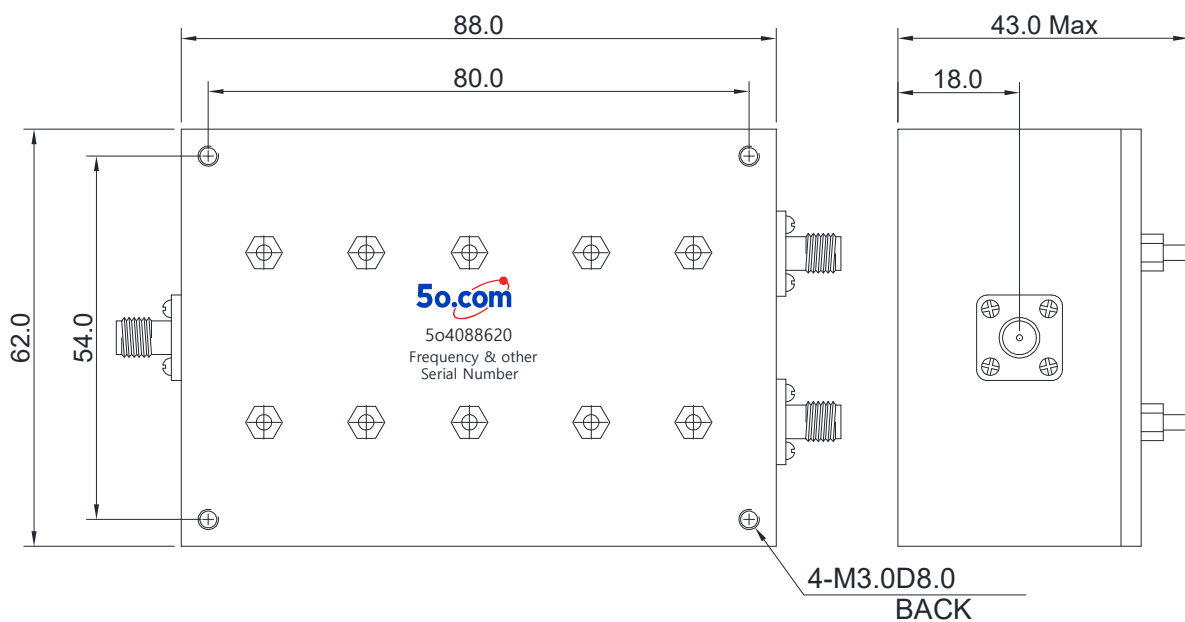

Tolerances: ±2% unless otherwise stated