

Duplexer 136 ~ 470MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min (dB)	Ripple Max (dB)	Insertion Loss Max (dB)	VSWR Max	Power (W)	Connector Type
5o40951150136470SK	CH1	136 ~ 174	70	0.5	0.8	1.45	100	SMA Female
	CH2	400 ~ 470						
5o40951150136470NK	CH1	136 ~ 174	70	0.5	0.8	1.45	100	N Female
	CH2	400 ~ 470						

Basic Specifications

Dimension	95*115*25mm	Impedance	50Ω
Power	100W	Operating Temperature	-40 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension (mm)

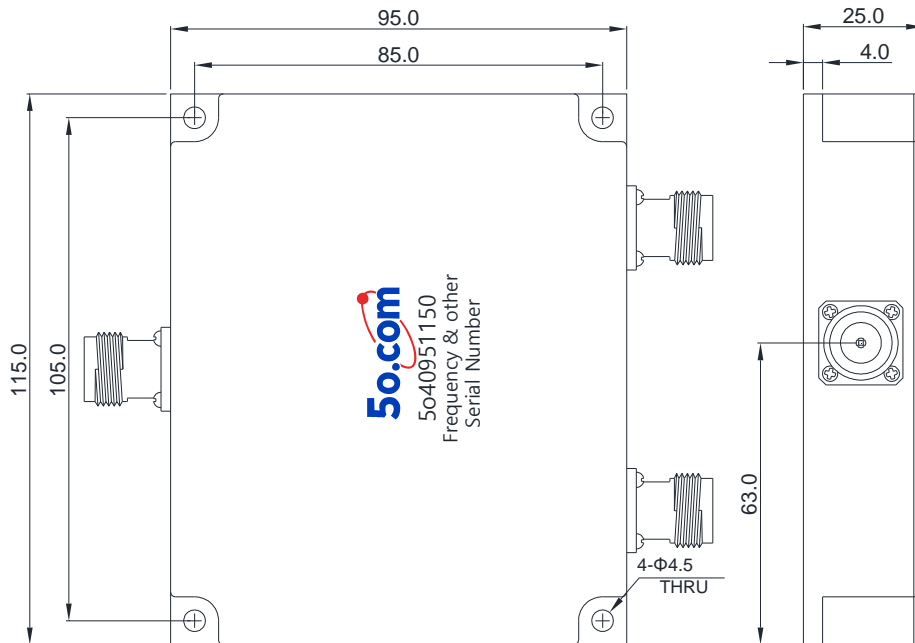

Tolerances: ±2% unless otherwise stated.