

## Duplexer 5565 ~ 5850MHz

### Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


### RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o409580155655850SK	CH1	5725~5850	60	1.5	1.45	50	SMA Female
	CH2	5565~5675					
5o409580155655850SKTNK	CH1	5725~5850	60	1.5	1.45	50	SMA Female @TX & RX
	CH2	5565~5675					N Female @ANT

### Basic Specifications

Dimension	95*80*24mm	Impedance	50Ω
Power	50W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

### Overall Dimension(mm)

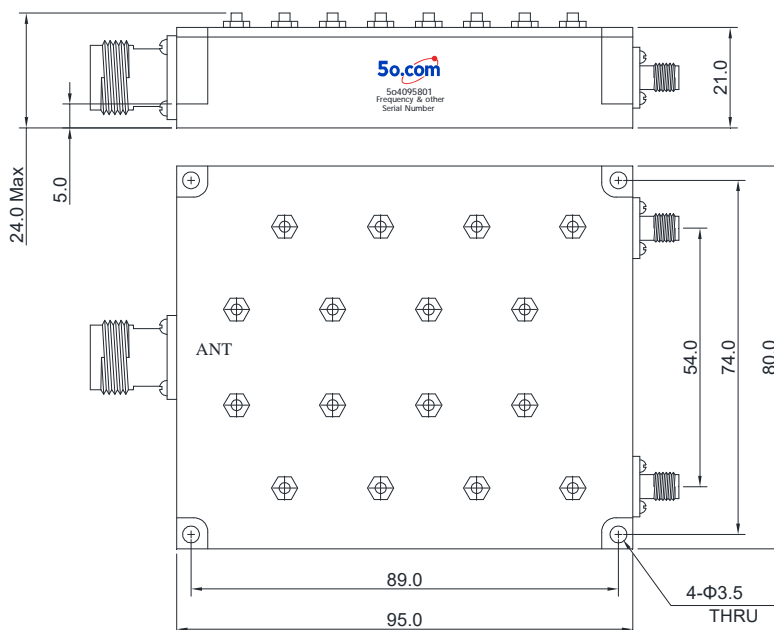

Tolerances: ±2% unless otherwise stated