

# Triplexer 850 ~ 3000MHz

## Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o411008608503000NK	CH1	850 ~ 1000	30	0.5	1.22	100	N Female
	CH2	1700 ~ 2000					
	CH3	2500 ~ 3000					
5o411008608503000SK	CH1	850 ~ 1000	30	0.5	1.22	100	SMA Female
	CH2	1700 ~ 2000					
	CH3	2500 ~ 3000					

## Basic Specifications

Dimension	100*86*43mm	Impedance	50Ω
Power	100W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

## Overall Dimension(mm)

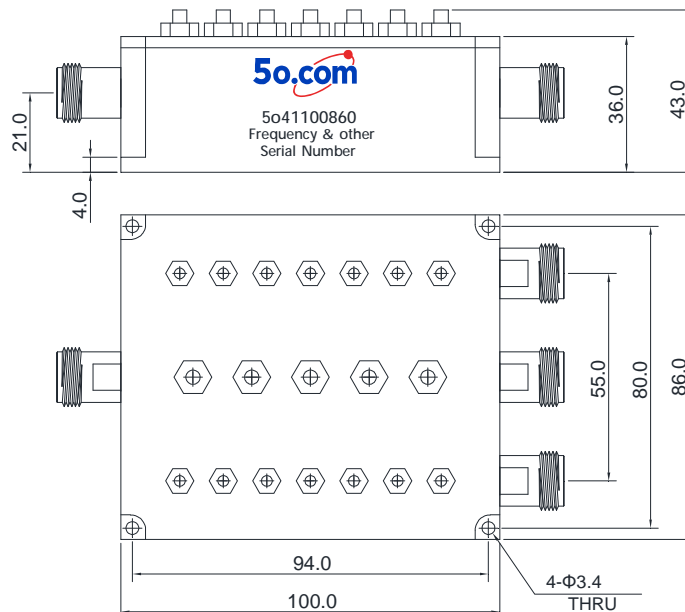

Tolerances: ±2% unless otherwise stated.