

Triplexer 1000 ~ 3700MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Power (W)	Connector Type
5o4111676010003700SK	CH1	1000 ~ 1250	30	0.5	1.22	100	SMA Female
	CH2	2000 ~ 2500					
	CH3	3000 ~ 3750					
5o4111676010003700NK	CH1	1000 ~ 1250	30	0.5	1.22	100	N Female
	CH2	2000 ~ 2500					
	CH3	3000 ~ 3750					

Basic Specifications

Dimension	116*76*40mm	Impedance	50Ω
Power	100W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

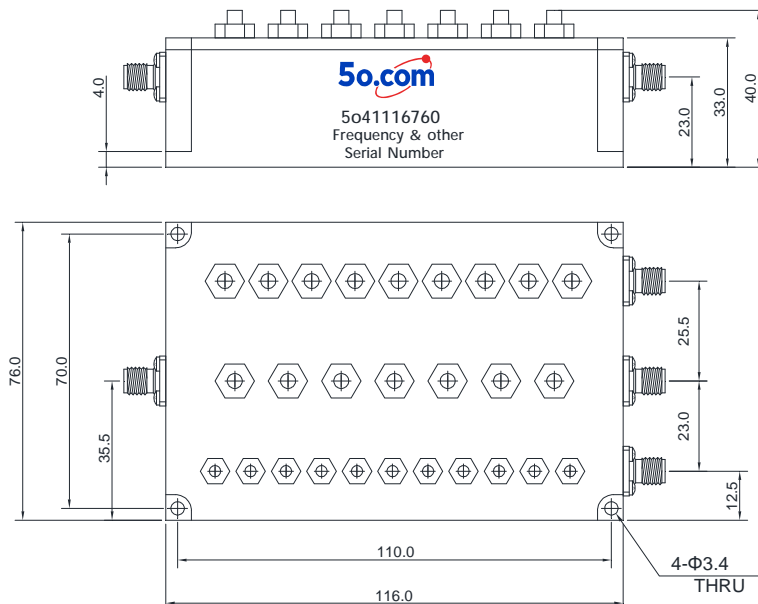

Tolerances: ±2% unless otherwise stated.