

Triplexer 1750 ~ 2300MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Ripple Max(dB)	Insertion Loss Max(dB)	VSWR Max	Connector Type
5o41135185017502300NK	CH1	1750 ~ 1850	100	0.5	0.8	1.3	N Female
	CH2	2025 ~ 2120					
	CH3	2200 ~ 2300					
5o41135185017502300SK	CH1	1750 ~ 1850	100	0.5	0.8	1.3	SMA Female
	CH2	2025 ~ 2120					
	CH3	2200 ~ 2300					

Basic Specifications

Dimension	135*185*43mm	Impedance	50Ω
Power	100W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

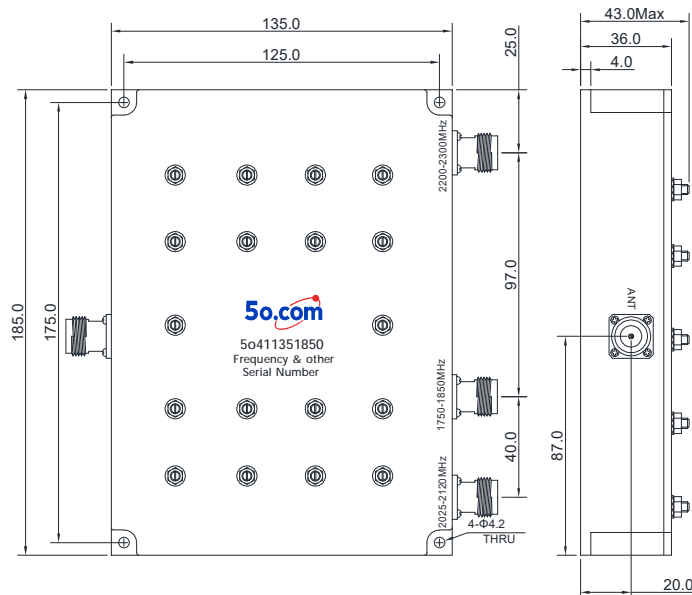

Tolerances: ±2% unless otherwise stated.