

Triplexer 2100 ~ 6900MHz

Application

- ▶ Mobile communication system.
- ▶ Public safety and emergency communication.
- ▶ Military, space and commercial applications.
- ▶ It can be customized according to customer requirements.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)		Isolation Min(dB)	Insertion Loss Max(dB)	VSWR Max	Connector Type
5o417164021006900SK	CH1	2100 ~ 2300	30	0.5	1.22	SMA Female
	CH2	4200 ~ 4600				
	CH3	6300 ~ 6900				
5o417164021006900NK	CH1	2100 ~ 2300	30	0.5	1.22	N Female
	CH2	4200 ~ 4600				
	CH3	6300 ~ 6900				

Basic Specifications

Dimension	71*64*27mm	Impedance	50Ω
Power	100W	Operating Temperature	-30 ~ +70°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

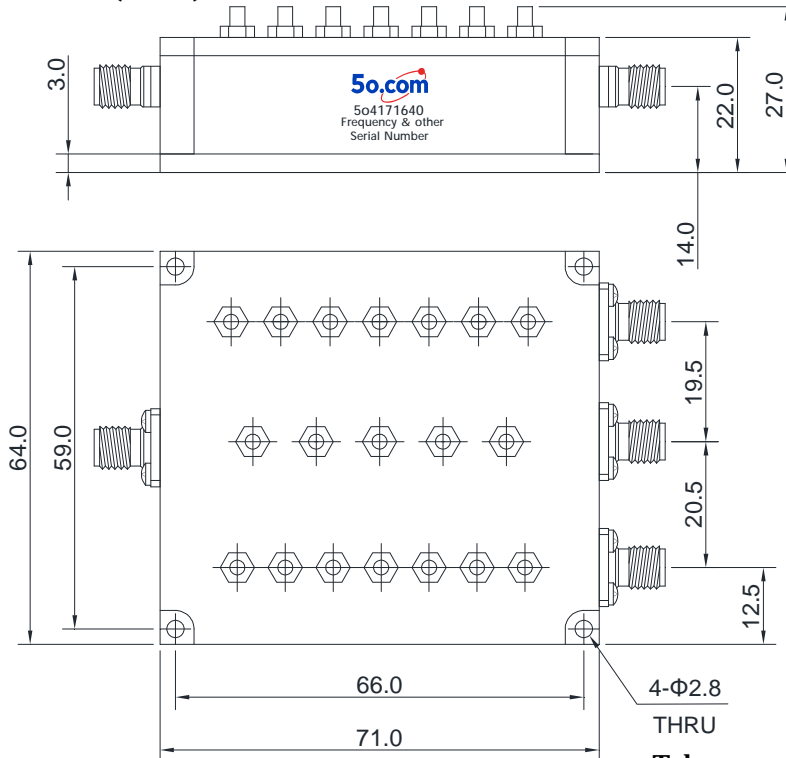

Tolerances: ±2% unless otherwise stated.