

4 TX Combiner 350 ~ 520MHz

Application

- ▶ Base Stations & Antenna feeds.
- ▶ Remote control and Internet of Things devices.
- ▶ Military, Space and Commercial applications.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss(dB)	Isolation Min(dB)	VSWR Max
5o4461U1351366NK	351 ~ 366	7.0dB Max.	75dB Min.	1.2:1 Max.
5o4461U1400420NK	400 ~ 420	7.0dB Max.	75dB Min.	1.2:1 Max.
5o4461U1410440NK	410 ~ 440	7.0dB Max.	75dB Min.	1.2:1 Max.
5o4461U1440470NK	440 ~ 470	7.0dB Max.	75dB Min.	1.2:1 Max.
5o4461U1450470NK	450 ~ 470	7.0dB Max.	75dB Min.	1.2:1 Max.

Basic Specifications

Number of Channels	N Female @4xTX N Female @1xANT
Input Power	TX-ANT 50W/CH
Weight	~9.5 Kg
Dimension	1U (483*300*45mm)
Appearance color	Black
Operating Temperature	-30~+75°C
Storage Temperature	-55~+125°C

Overall Dimension(mm)

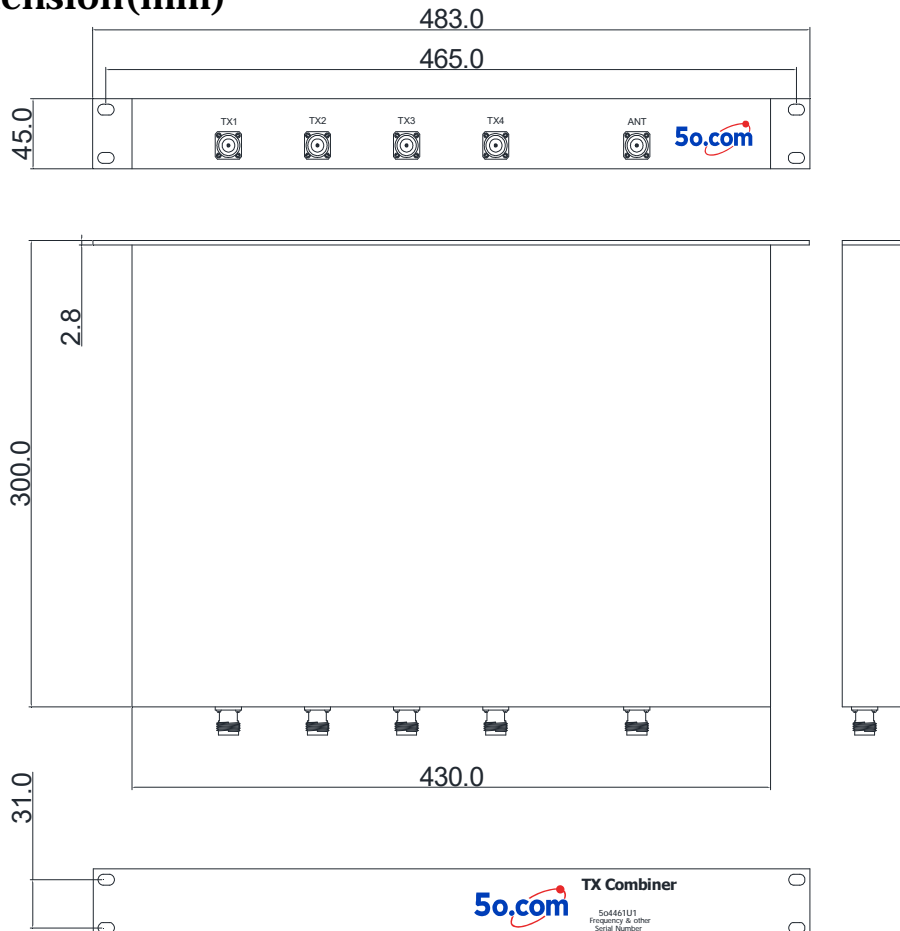

Tolerances: ±2% unless otherwise stated.