

2 way Combiner / Hybrid Coupler 350 ~ 520MHz

Application

- ▶ Multi-system shared antenna feed system..
- ▶ Base station and repeater system.
- ▶ Indoor distribution system.
- ▶ Radio intercom system.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type	Power (W)
5o4T150305700350520NK	350~ 520	0.5 (Coupling 6dB)	23	1.2	N Female	200(4x50)
5o4T150305700350520SK	350 ~ 520	0.5 (Coupling 6dB)	23	1.2	SMA Female	100(4x25)
5o4T150305700400470NK	400~ 470	0.4 (Coupling 6dB)	25	1.2	N Female	200(4x50)
5o4T150305700400470SK	400~ 470	0.4 (Coupling 6dB)	25	1.2	SMA Female	100(4x25)

Basic Specifications

Dimension	305*70*50mm	Operating Temperature	-40 ~ +85°C
Impedance	50Ω	Storage Temperature	-55~+125°C

Overall Dimension(mm)

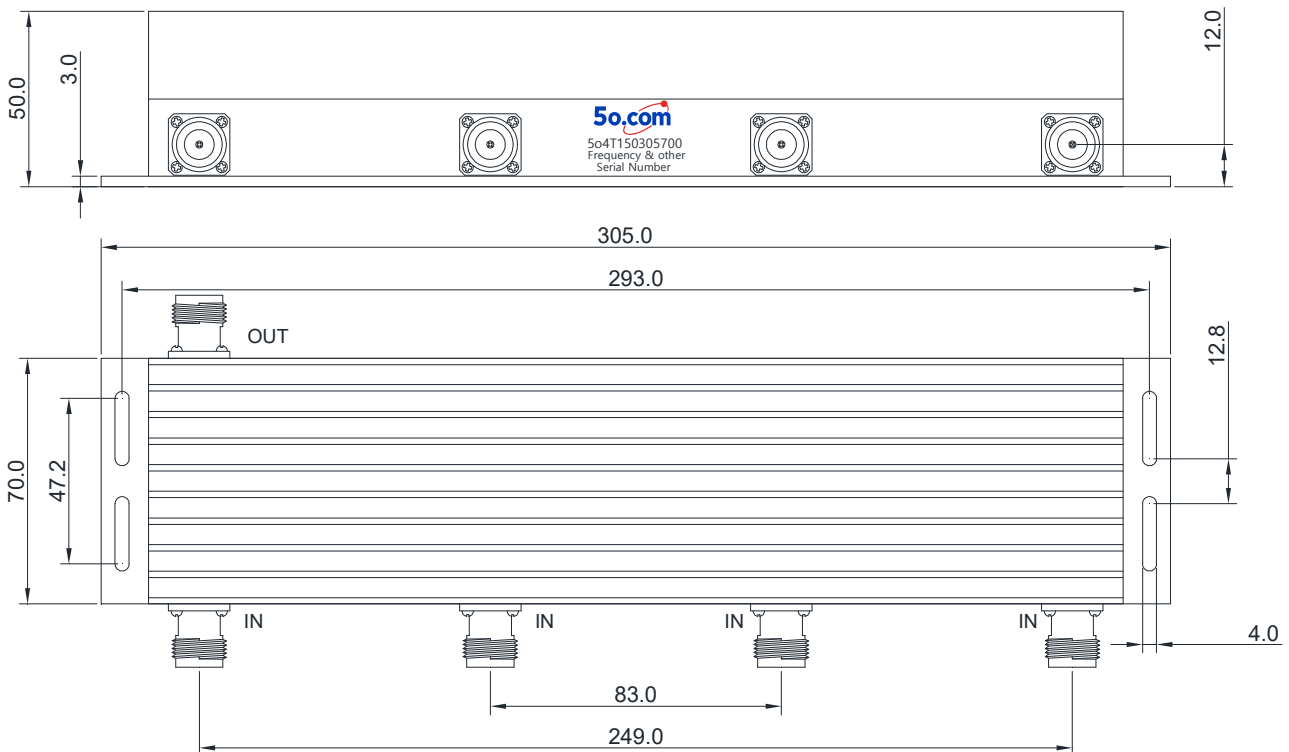

Tolerances: ±2% unless otherwise stated.