

4 way Combiner / Hybrid Coupler 350 ~ 470MHz

Application

- ▶ Multi-system shared antenna feed system..
- ▶ Base station and repeater system.
- ▶ Indoor distribution system.
- ▶ Radio intercom system.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type	Power(W)
5o4T250262801350370NK	350 ~ 370	0.6 (Coupling 6dB)	23	1.25	N Female	200(4x50)
5o4T250262801350370SK	350 ~ 370	0.6 (Coupling 6dB)	23	1.25	SMA Female	100(4x25)
5o4T250262801350370DK	350 ~ 370	0.6 (Coupling 6dB)	23	1.25	7/16 Female	200(4x50)
5o4T250262801400470NK	400 ~ 470	0.6 (Coupling 6dB)	23	1.25	N Female	200(4x50)
5o4T250262801400470SK	400 ~ 470	0.6 (Coupling 6dB)	23	1.25	SMA Female	100(4x25)
5o4T250262801400470DK	400 ~ 470	0.6 (Coupling 6dB)	23	1.25	7/16 Female	200(4x50)

Basic Specifications

Dimension	262*80*50mm	Operating Temperature	-40 ~ +85°C
Impedance	50Ω	Storage Temperature	-55~+125°C

Overall Dimension(mm)

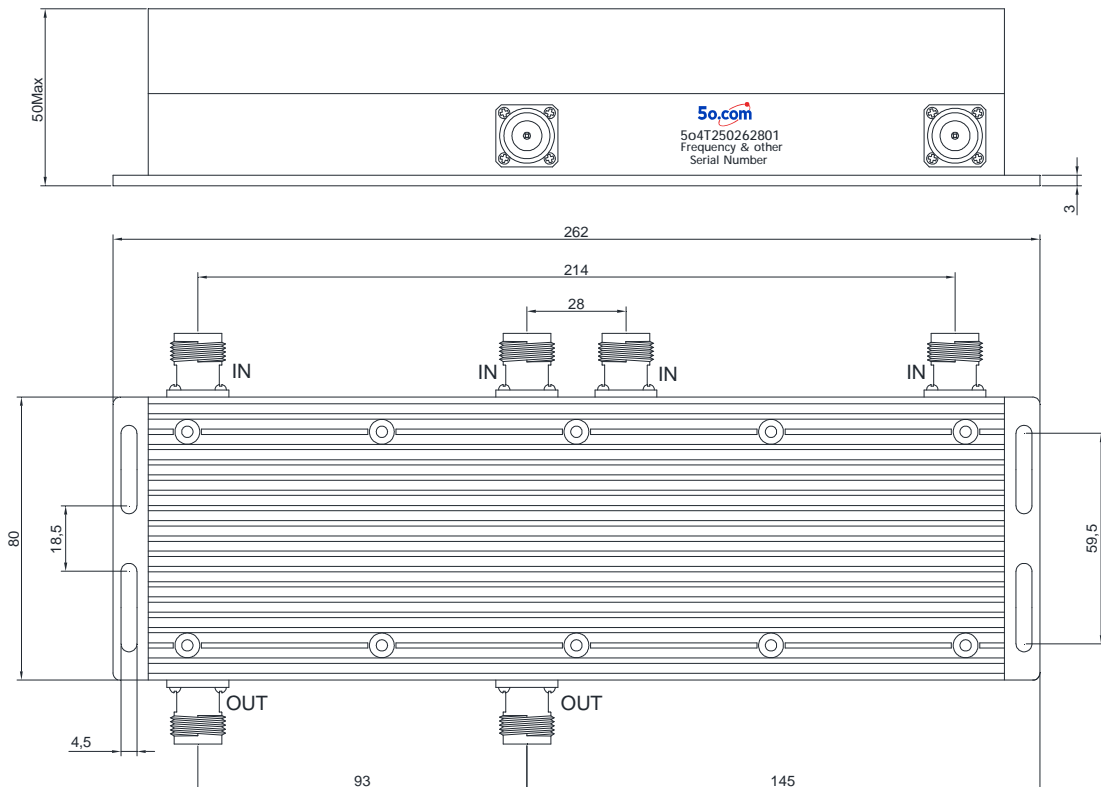

Tolerances: ±2% unless otherwise stated.