

Dual Directional Coupler 3.0 ~ 6.0GHz

Application

- ▶ Applications of Radio frequency and Microwave systems.
- ▶ Industrial and sensing applications.
- ▶ Radio frequency mixing and filtering.
- ▶ High power processing, anti-interference test , etc.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (GHz)	Nominal Coupling (dB)	IL (dB)	Directivity (dB)	VSWR	Power(W)	Connector Type
5o561002503610NK	3.0 ~6.0	10±1.5	1.5	18	1.5	30	N Female
5o561002503620NK	3.0 ~6.0	20±1	1.1	18	1.3	50	N Female
5o561002503630NK	3.0 ~6.0	30±1	1.0	18	1.3	100	N Female
5o561002503610SK	3.0 ~6.0	10±1.5	1.5	18	1.5	30	SMA Female
5o561002503620SK	3.0 ~6.0	20±1	1.1	18	1.3	50	SMA Female
5o561002503630SK	3.0 ~6.0	30±1	1.0	18	1.3	100	SMA Female

Basic Specifications

Dimension	100*25*19mm	Impedance	50Ω
Operating Temperature	-55 ~ +85°C	Storage Temperature	-55~+125°C

Overall Dimension(mm)

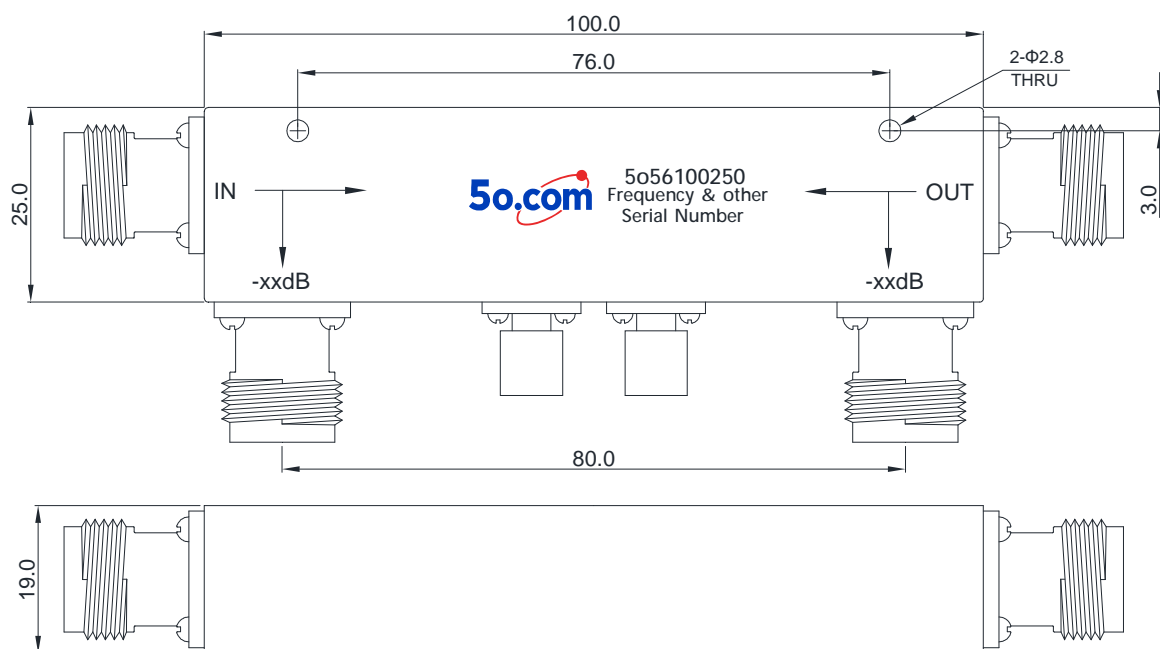

Tolerances: ±2% unless otherwise stated.