Dual Directional Coupler 800 ~ 3600MHz

Application

▶Applications of Radio frequency and Microwave systems.
▶Industrial and sensing applications.
▶Radio frequency mixing and filtering.
▶High power processing, anti-interference test , etc.
▶It supports a one-year standard warranty.

RF Characteristics

Part Number	Frequency Range (GHz)	Nominal Coupling(dB)	IL. (dB)	Directivity (dB)	VSWR	Connector Type
5o562142400800360010 7SK	0.8 ~3.6	10±1.3 7±1.3	3.5	15	1.5	SMA Female
5o562142400800360010 7NK	0.8 ~3.6	10±1.3 7±1.3	3.5	15	1.5	N Female

Basic Specifications

Dimension	214*24*20mm	Connector Type	N/SMA Female
Power	10W	Operating Temperature	-40 ~ +70℃
Impedance	50Ω	Storage Temperature	-55~+125℃

Overall Dimension(mm)

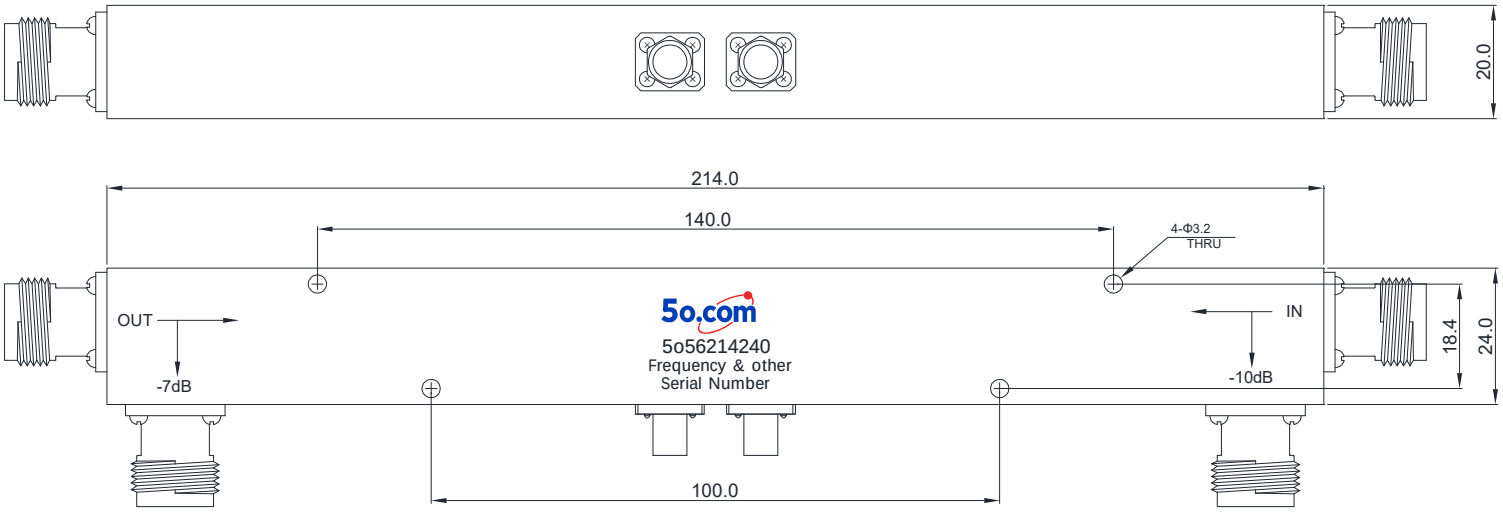

Tolerances: ±2% unless otherwise stated.