

Dual Directional Coupler 3.0 ~ 4.0GHz

Application

- ▶ Applications of Radio frequency and Microwave systems.
- ▶ Industrial and sensing applications.
- ▶ Radio frequency mixing and filtering.
- ▶ High power processing, anti-interference test, etc.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (GHz)	Nominal Coupling (dB)	IL. (dB)	Directivity (dB)	VSWR	Connector Type
5o56555503450NK	3.0 ~ 4.0	50±1.5	0.4	10	1.3	N Female

Basic Specifications

Dimension	55*55*20mm	Connector Type	N Female
Power	300W	Operating Temperature	-55 ~ +85°C
Impedance	50Ω	Storage Temperature	-55~+125°C

Overall Dimension (mm)

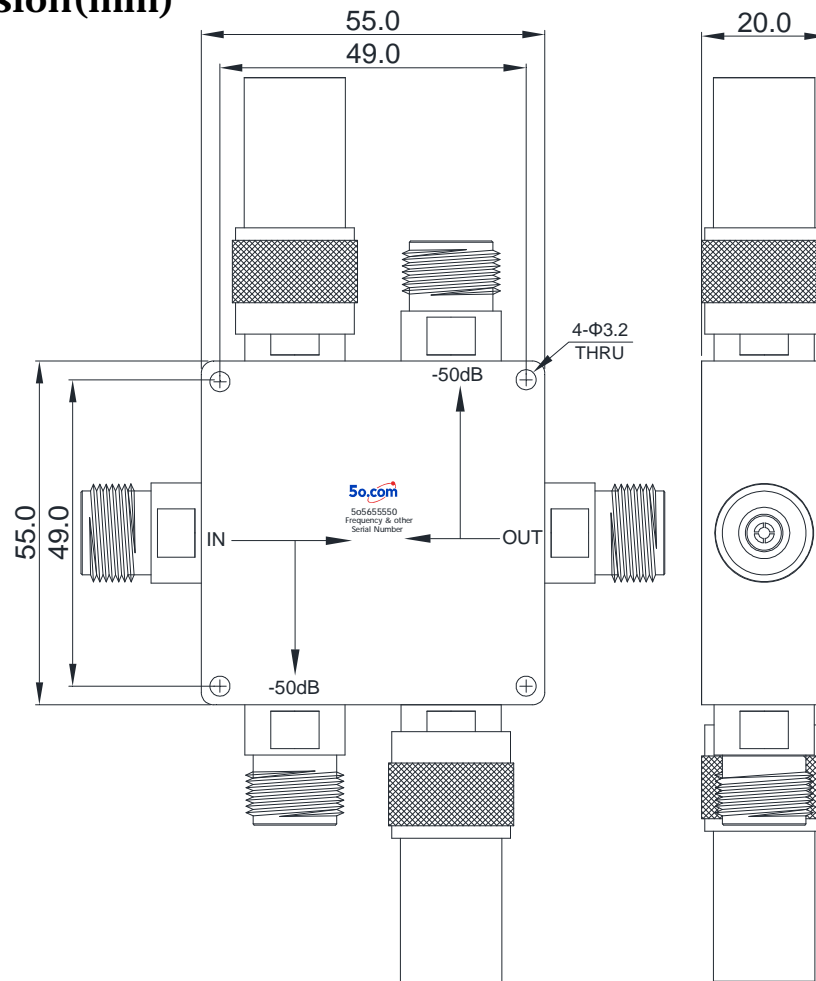

Tolerances: ±2% unless otherwise stated.