

# Dual Directional Coupler 1400 ~ 2000MHz

## Application

- ▶ Applications of Radio frequency and Microwave systems.
- ▶ Industrial and sensing applications.
- ▶ Radio frequency mixing and filtering.
- ▶ High power processing, anti-interference test , etc.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Frequency Range (GHz)	Nominal Coupling(dB)	IL. (dB)	Directivity (dB)	VSWR	Connector Type
5o567448014230SK	1.4 ~2.0	30±1.0 ±0.3@1.65~1.85GHz	0.5	18	1.3	SMA Female
5o567448014230NK	1.4 ~2.0	30±1.0 ±0.3@1.65~1.85GHz	0.5	18	1.3	N Female

## Basic Specifications

Dimension	74*48*20mm	Connector Type	N/SMA Female
Power	120W	Operating Temperature	-40~ +85°C
Impedance	50Ω	Storage Temperature	-55~+125°C

## Overall Dimension(mm)

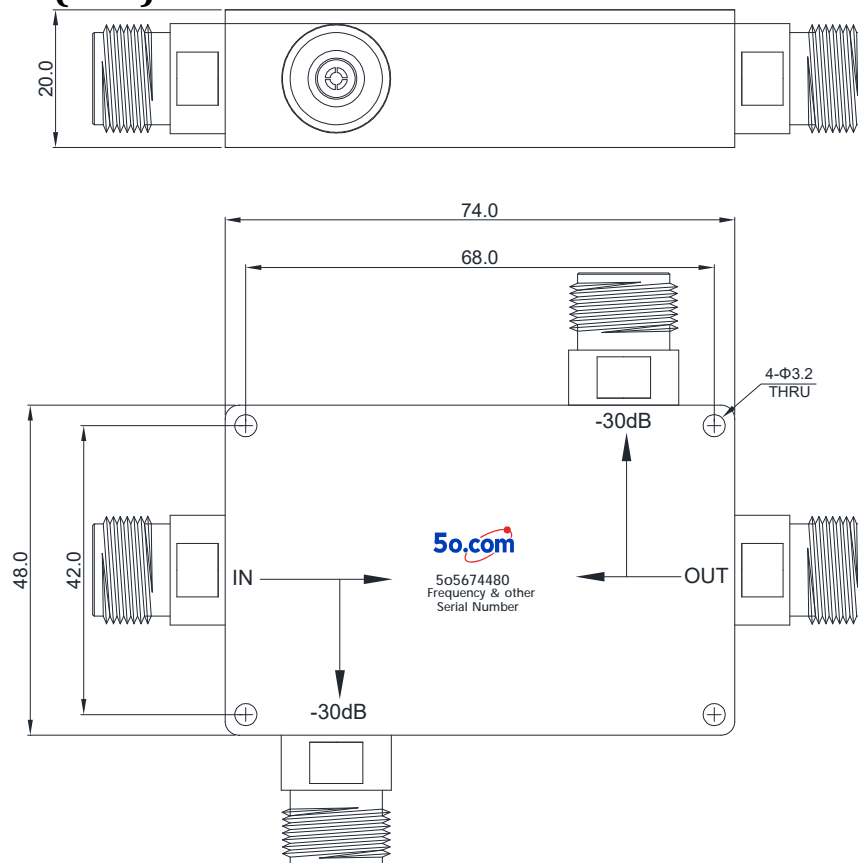

Tolerances: ±2% unless otherwise stated.