

# Waveguide to Coaxial Adapter WR2300 (BJ3)

## Application

- ▶ Testing and measuring equipment.
- ▶ Radar and communication systems.
- ▶ Satellite and wireless communication.
- ▶ Compact wiring scenario.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type
5o60WR23000320490NK	320~490	0.12	1.25	WR2300 (BJ3)	N Female
5o60WR23000320490SK	320~490	0.12	1.25	WR2300 (BJ3)	SMA Female
5o60WR23000320490DK	320~490	0.12	1.25	WR2300 (BJ3)	7/16 Female

## Basic Specifications

Power	100W	Impedance	50Ω
Peak Power	3W	Operating Temperature	-55 ~ +85°C
Connector Type (Waveguide)	WR2300(BJ3)	Storage Temperature	-55~+125°C

## Overall Dimension(mm)

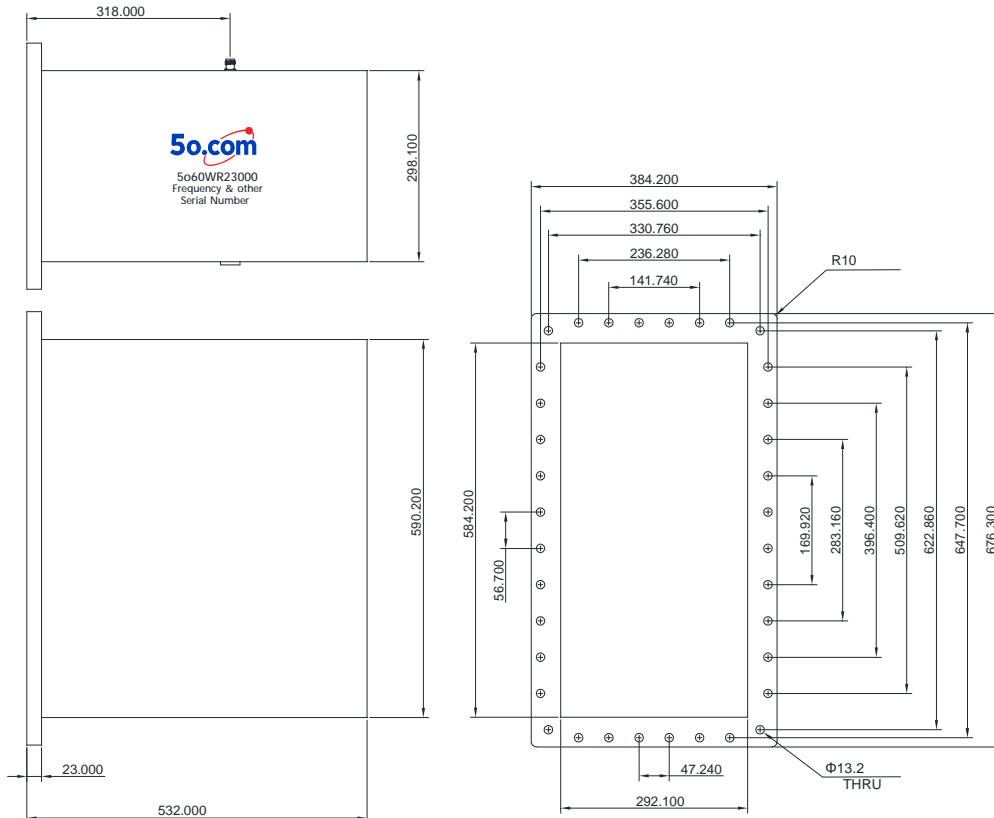

Tolerances: ±2% unless otherwise stated.