

# 6 TX Combiner 350 ~ 520MHz

## Application

- ▶ Base Stations & Antenna feeds.
- ▶ Remote control and Internet of Things devices.
- ▶ Military, Space and Commercial applications.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss(dB)	Isolation Min(dB)	VSWR Max
5o6461U1351366NK	351 ~ 366	9.5dB Max	75dB Min.	1.2:1 Max.
5o6461U1400420NK	400 ~ 420	9.5dB Max	75dB Min.	1.2:1 Max.
5o6461U1410440NK	410 ~ 440	9.5dB Max	75dB Min.	1.2:1 Max.
5o6461U1440470NK	440 ~ 470	9.5dB Max	75dB Min.	1.2:1 Max.
5o6461U1450470NK	450 ~ 470	9.5dB Max	75dB Min.	1.2:1 Max.

## Basic Specifications

Number of Channels	N Female @6xTX N Female @1xANT
Input Power	TX-ANT 50W/CH
Weight	~10.5 Kg
Dimension	1U (483*300*45mm)
Appearance color	Black
Operating Temperature	-30~+75°C
Storage Temperature	-55~+125°C

## Overall Dimension(mm)

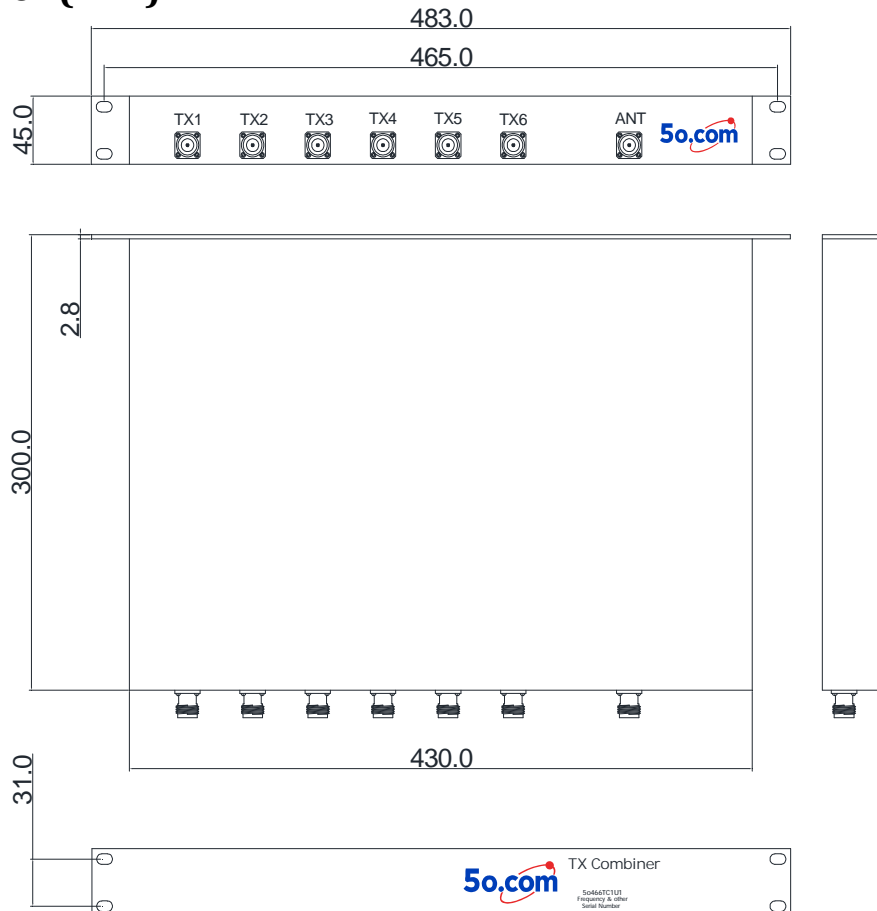

Tolerances: ±2% unless otherwise stated.